

# Product Environmental Profile

Fuse carrier TeSys DF, 1P 32A, fuse size 10 x 38 mm






## General information

<b>Representative product</b>	Fuse carrier TeSys DF, 1P 32A, fuse size 10 x 38 mm - DF101
<b>Description of the product</b>	Fuse holder installed in an electrical circuit to connect up a protective fuse-link that will isolate the circuit against a fault current. When opened on-load, the fuse holder also serves to disconnect the circuit. Conformity to standards IEC60269-1-2, IEC 60947 -1-3, IEC60715, IEC61373, DIN 43880 et EL5920X 00214B
<b>Functional unit</b>	Protecting electrical circuits from current surges and guaranteeing the electrical safety of the system for 20 years. Impacts are given for a product unit ("declared unit").



## Constituent materials

**Reference product mass** 48 g including the product, its packaging and additional elements and accessories

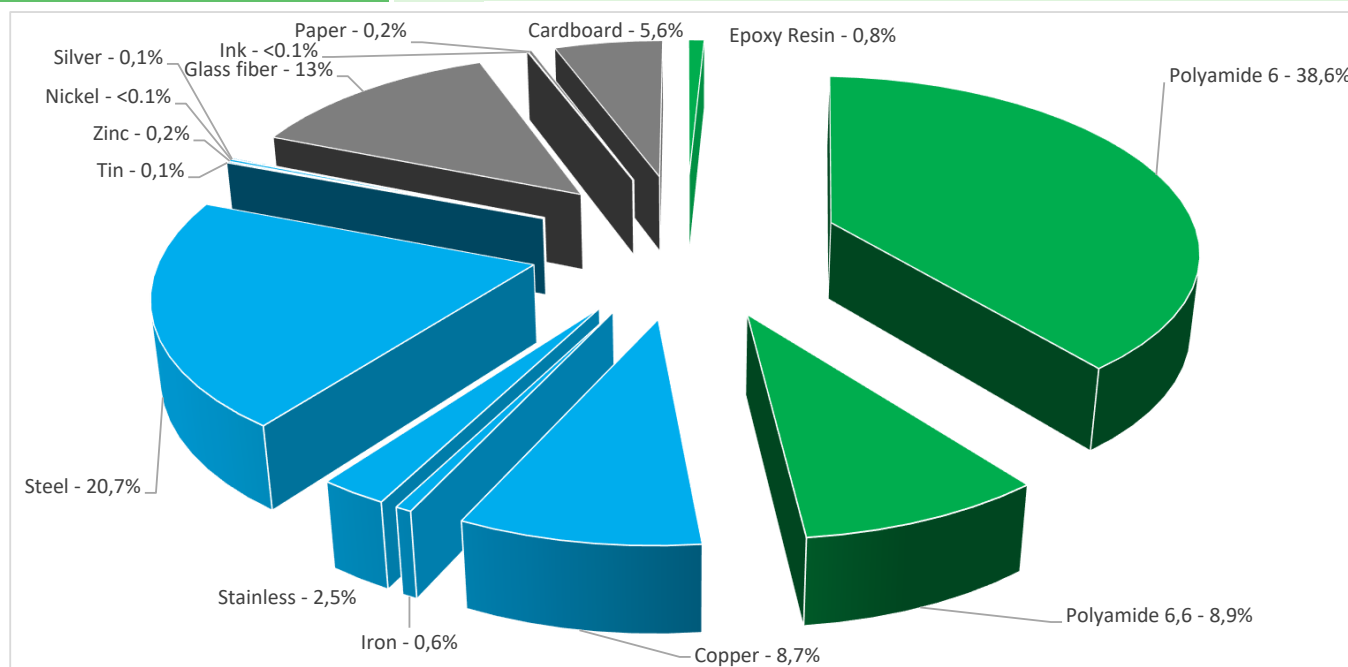

Plastics	48,3%
Metals	32,9%
Others	18,8%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Fuse carrier TeSys DF, 1P 32A, fuse size 10 x 38 mm presents the following relevant environmental aspects

<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified		
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive		
	Packaging weight is 2,78 g, consisting of Cardboard 2,7g and Paper 0,08g Product distribution optimised by setting up local distribution centres		
<b>Installation</b>	Ref DF101 does not require any installation operations.		
<b>Use</b>	The product does not require special maintenance operations.		
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials		
	No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.		
	Recyclability potential:	<b>94%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




## Environmental impacts

<b>Reference life time</b>	20 years		
<b>Product category</b>	Other equipments - Passive product - non-continuous operation		
<b>Installation elements</b>	No special components needed		
<b>Use scenario</b>	load rate / rated current (In): 30 % of In percentage of utilization time: 30%		
<b>Geographical representativeness</b>	Europe		
<b>Technological representativeness</b>	Fuse holder installed in an electrical circuit to connect up a protective fuse-link that will isolate the circuit against a fault current. When opened on-load, the fuse holder also serves to disconnect the circuit. Conformity to standards IEC60269-1-2, IEC 60947 -1-3, IEC60715, IEC61373, DIN43880 et EL5920X 00214B		

<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Fuse carrier TeSys DF, 1P 32A, fuse size 10 x 38 mm - DF101					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3,47E-05	3,46E-05	0*	0*	8,04E-08	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	5,18E-03	8,83E-04	4,17E-04	6,04E-07	3,86E-03	1,89E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4,90E-04	1,93E-04	4,25E-05	1,39E-07	2,33E-04	2,16E-05
Contribution to global warming	kg CO <sub>2</sub> eq	1,45E+00	5,06E-01	1,67E-02	0*	9,25E-01	4,84E-03
Contribution to ozone layer depletion	kg CFC11 eq	1,19E-07	5,82E-08	2,94E-11	0*	6,03E-08	1,05E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	3,86E-04	1,52E-04	2,09E-05	4,29E-08	2,12E-04	1,46E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	3,36E+00	3,04E-03	0*	0*	3,36E+00	0*
Total Primary Energy	MJ	2,34E+01	7,01E+00	2,17E-01	0*	1,61E+01	5,35E-02

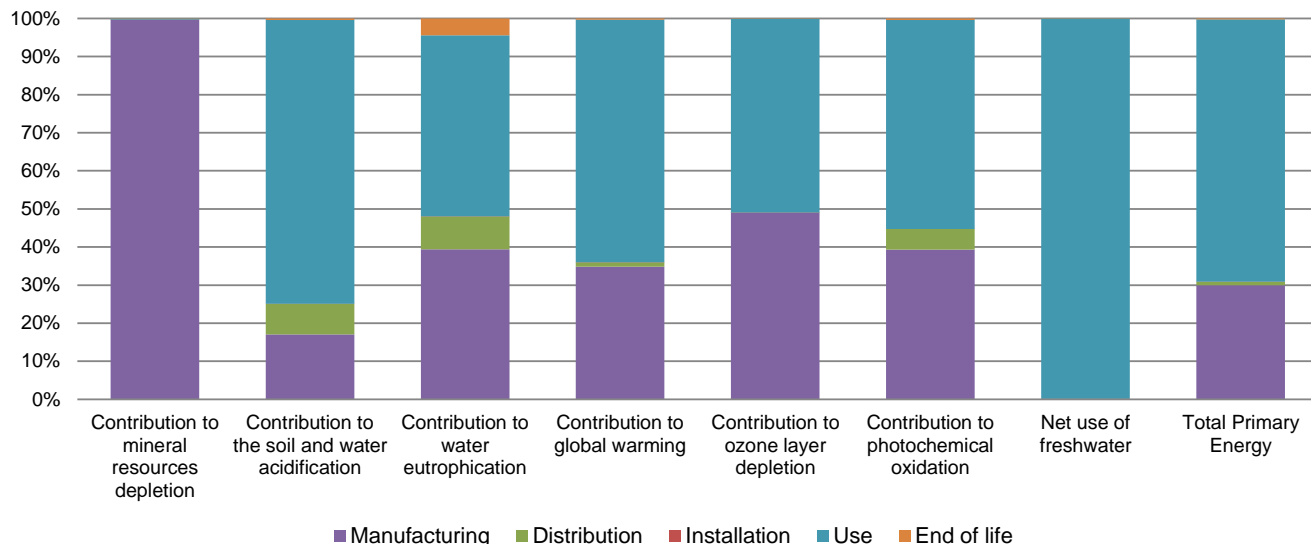

Optional indicators		Fuse carrier TeSys DF, 1P 32A, fuse size 10 x 38 mm - DF101					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1,44E+01	3,63E+00	2,15E-01	1,89E-03	1,05E+01	4,98E-02
Contribution to air pollution	m³	1,26E+02	8,36E+01	2,06E+00	0*	3,98E+01	5,14E-01
Contribution to water pollution	m³	1,86E+02	1,44E+02	2,52E+00	2,21E-02	3,82E+01	5,79E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6,03E-04	6,03E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2,55E+00	1,95E-01	2,79E-04	0*	2,35E+00	1,13E-03
Total use of non-renewable primary energy resources	MJ	2,34E+01	7,01E+00	2,17E-01	0*	1,61E+01	5,35E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2,52E+00	1,72E-01	2,79E-04	0*	2,35E+00	1,13E-03
Use of renewable primary energy resources used as raw material	MJ	2,27E-02	2,27E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2,27E+01	0*	2,17E-01	0*	1,61E+01	5,35E-02
Use of non renewable primary energy resources used as raw material	MJ	6,95E-01	6,95E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,52E+00	1,52E+00	0*	0*	4,82E-04	0*
Non hazardous waste disposed	kg	3,77E+00	2,72E-01	5,26E-04	0*	3,45E+00	4,61E-02
Radioactive waste disposed	kg	2,52E-03	2,14E-04	3,67E-07	0*	2,30E-03	1,32E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2,91E-03	2,10E-04	0*	2,70E-03	0*	0*
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

<i>Registration number</i>	ENVPEP2010021_V1	<i>Drafting rules</i>	PCR-ed3-EN-2015 04 02
<i>Date of issue</i>	10/2020	<i>Supplemented by</i>	PSR-0005-ed2-EN-2016 03 29
<i>Validity period</i>	5 years	<i>Information and reference documents</i>	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP2010021\_V1

© 2019 - Schneider Electric – All rights reserved

10/2020