Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN



!

Part No.: 885.230.75

(UK
	CA

MECHANICAL DATA

MECHANICAL DATA	MECHANICAL DATA		
Height	151 mm		
Diameter	98 mm		
Materials	PC PC/ABS		
Dome colour	Green		
Housing colour	Black		
Protection category	IP65		
Connection	Screw terminals		
cross-sectional area maximum	1,50mm² / 16AWG		
Cable entry	Rubber pinch		
Cable entry minimum	d = 5 mm		
Cable entry maximum	d = 7 mm		
Type of fixing	Base mounting		
Working temperature minimum	-30°C		
Working temperature maximum	+50°C		
Weight with packaging	370 g		
Product weight	320 g		
ELECTRICAL DATA			
Operating voltage	24V		
Operating voltage type	AC/DC		
Operating voltage frequency	50Hz		
Operating voltage tolerance	+/- 10%		
Rated operational voltage	24 VDC		
Rated operational current	175 mA		
Rated inrush current	<10A		
Protection class	Protection class 2		
Pollution degree	3		
Overvoltage category	II		
OPTICAL DATA			
Light source	LED		
Light colour	Green		
Optical signal image	Revolving		
Service life optical	50,000 h maximum		
Rotation speed (rpm)	180 U/min		
APPROVAL DATA			
Conforms with CE	Yes		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN

Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN

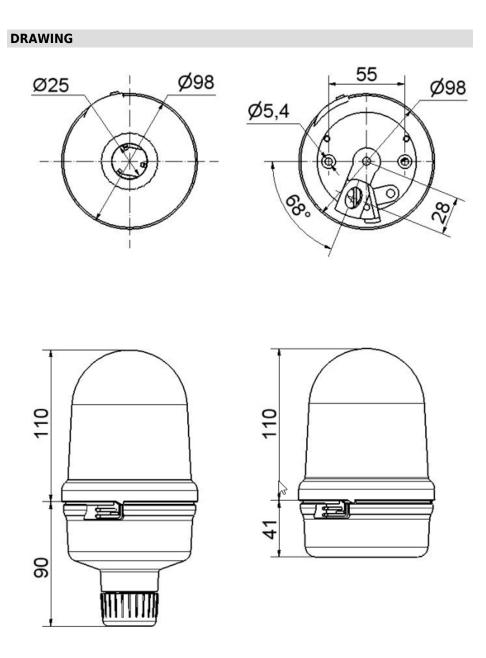

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.