


FLAT SLIM round

672654.002.1.04 |



Ceiling and wall luminaires
4051859981176
D 300, H 70

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

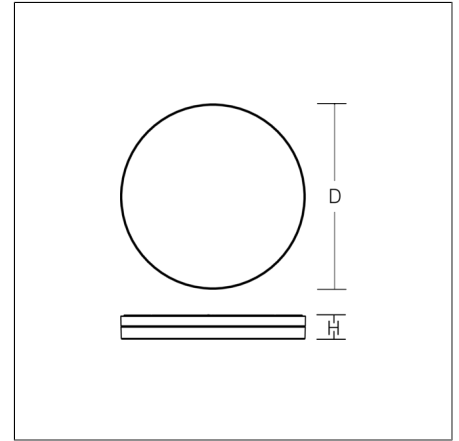

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: bayonet system. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

FLAT SLIM round

672654.002.1.04 |



Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Diameter D	300 mm
Height H	70 mm
Weight	1.94 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 1450 lm 2400 lm
	4000 K: 1450 lm 2450 lm
System power, mains operation	3000 K: 14 W 20 W
	4000 K: 14 W 20 W
Rated luminous flux, emergency operation	190 lm
System efficiency	3000 K: 104 lm/W 120 lm/W
	4000 K: 104 lm/W 123 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 22,6 24,4
	4000 K: 22,6 24,4
Beam angle	down 143° up 180°
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	36 66 88 83 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	5 °C ... + 25 °C
Safety marks	D-mark
Conformity mark	CE, EAC