

KombiSIGN 50 / Permanent Beacon 846

Perm. light element 12-230VAC/DC RD



| Part No.: | 846.100.00 |
|-----------|--------------|
| Series: | KombiSIGN 50 |

| MECHANICAL DATA | | |
|-----------------------------|-------------|--|
| Height | 67 mm | |
| Diameter | 52 mm | |
| Materials | PC | |
| Dome colour | Red | |
| Protection category | IP54 | |
| Tension relief | Not present | |
| Working temperature minimum | -20°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 51 g | |
| Product weight | 38 g | |

| ELECTRICAL DATA | | |
|------------------------|--------------------------|--|
| Operating voltage | 12-230V | |
| Operating voltage type | AC/DC | |
| Protection class | Protection class 2 | |
| Pollution degree | 3 | |
| Overvoltage category | II | |
| Isolation voltage | Ui = 250V; Uimp = 2.500V | |
| Power illuminant | max. 5W | |

| OPTICAL DATA | | |
|----------------------|-----------------|--|
| Light colour | Red | |
| Service life optical | depends on bulb | |
| Lamp fitting/socket | B15d | |

| APPROVAL DATA | | |
|-------------------------------|-----------------------|--|
| Conforms with CE | Yes | |
| Conforms with RoHS directive | Yes | |
| WEEE | Yes | |
| Conforms with ATEX-directive | No | |
| Conforms with CCC | No | |
| Conforms with UL | cULus | |
| UL Type Rating | Type 12 | |
| Conforms with FCC | No | |
| Conforms with IC | No | |
| EAC certificate available | Yes | |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) | |
| Conforms with CMIM | No | |
| Conforms with AS-I | No | |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 50 / Permanent Beacon 846

Perm. light element 12-230VAC/DC RD

| ICAO Certification | No |
|-----------------------|----|
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

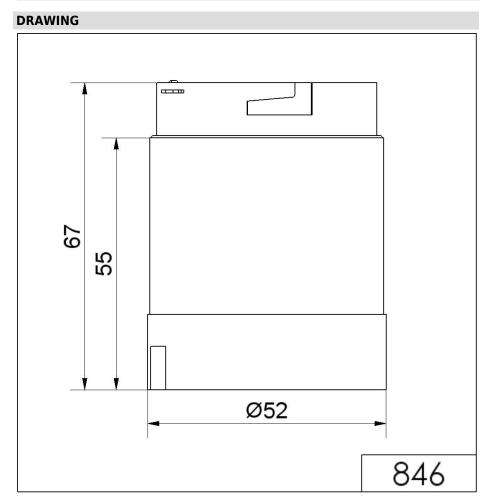

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.