

Product Environmental Profile

NSX undervoltage release MN 220-240V 50/60HZ screwless






General information

Reference product	NSX undervoltage release MN 220-240V 50/60HZ screwless - LV429407
Description of the product	The NSX undervoltage release opens the circuit breaker when the MN supply voltage drops under defined value. It automatically trips the breaker. It is an auxiliary used for emergency stop or remote opening applications This auxiliary opens the circuit breaker when the control voltage drops to a value lower than 35% of its rated voltage It complies with the IEC 60947-2 standard
Functional unit	Undervoltage release allow user to remotely trip the circuit breaker during 10 years in accordance with IEC 60947-2



Constituent materials

Reference product mass	120 g including the product, its packaging and additional elements and accessories
------------------------	--

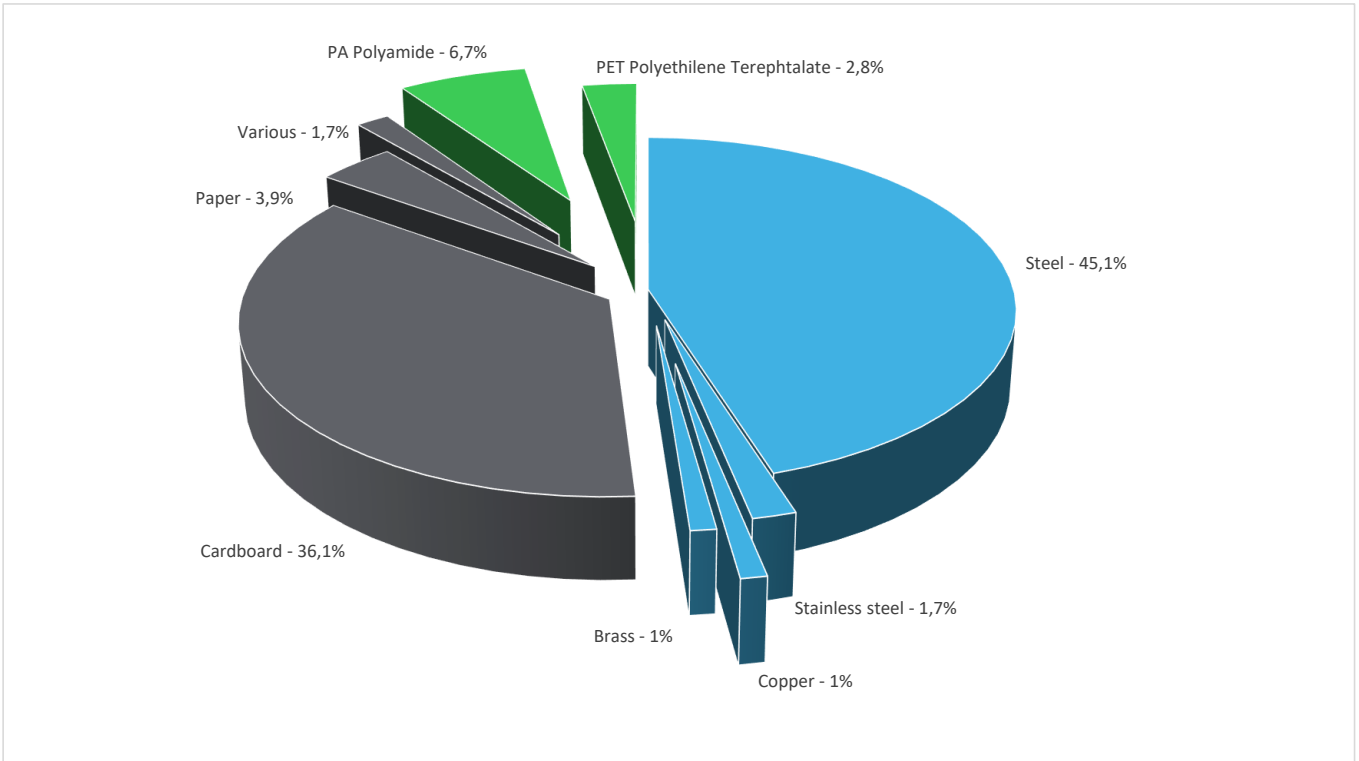

Plastics	9,5%
Metals	48,8%
Others	41,7%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>



Additional environmental information

End Of Life	Recyclability potential:	80%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	------------	---


Environmental impacts

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed			
Use scenario	the product is in active mode 99,99% of the time with a power of 5W and off during the remaining time, for 10 years			
Technological representativeness	The modules of technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Europe			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		NSX undervoltage release MN 220-240V 50/60HZ screwless - LV429407						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1,80E+02	4,29E-01	3,46E-02	8,41E-02	1,80E+02	1,81E-01	-3,79E-01
Contribution to climate change-fossil	kg CO2 eq	1,80E+02	4,23E-01	3,46E-02	8,03E-02	1,79E+02	1,81E-01	-3,77E-01
Contribution to climate change-biogenic	kg CO2 eq	2,49E-01	5,76E-03	0*	3,74E-03	2,39E-01	2,36E-04	-1,95E-03
Contribution to climate change-land use and land use change	kg CO2 eq	3,93E-09	0*	0*	0*	0*	3,93E-09	0,00E+00
Contribution to ozone depletion	kg CFC-11 eq	8,80E-07	7,56E-08	3,05E-08	5,56E-09	7,68E-07	6,53E-10	-5,39E-08
Contribution to acidification	mol H+ eq	1,03E+00	2,22E-03	1,50E-04	3,34E-04	1,02E+00	5,67E-04	-2,37E-03
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	5,03E-04	2,30E-06	0*	6,07E-07	4,92E-04	8,41E-06	-8,27E-07
Contribution to eutrophication marine	kg N eq	1,17E-01	3,97E-04	6,91E-05	8,84E-05	1,16E-01	1,02E-04	-2,37E-04
Contribution to eutrophication, terrestrial	mol N eq	1,76E+00	4,20E-03	7,49E-04	6,67E-04	1,75E+00	1,13E-03	-2,65E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	3,76E-01	1,40E-03	2,45E-04	1,78E-04	3,74E-01	3,99E-04	-9,11E-04
Contribution to resource use, minerals and metals	kg Sb eq	4,22E-05	2,90E-05	0*	0*	1,30E-05	2,42E-07	-1,09E-04
Contribution to resource use, fossils	MJ	4,60E+03	1,05E+01	0*	8,75E-01	4,57E+03	1,14E+01	-8,18E+00
Contribution to water use	m3 eq	6,62E+00	1,65E-01	1,75E-03	3,59E-02	6,35E+00	6,71E-02	-1,70E-01

Additional indicators for the French regulation are available as well


Inventory flows Indicators			NSX undervoltage release MN 220-240V 50/60HZ screwless - LV429407						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits	
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]	
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	8,78E+02	0*	0*	0*	8,78E+02	0*	7,40E-02	
Contribution to use of renewable primary energy resources used as raw material	MJ	3,28E-01	3,28E-01	0*	0*	0*	0*	-2,36E-01	
Contribution to total use of renewable primary energy resources	MJ	8,79E+02	2,07E-01	0*	0*	8,78E+02	0*	-1,61E-01	
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4,60E+03	1,01E+01	0*	8,75E-01	4,57E+03	1,14E+01	-8,18E+00	
Contribution to use of non renewable primary energy resources used as raw material	MJ	3,63E-01	3,63E-01	0*	0*	0*	0*	0,00E+00	
Contribution to total use of non-renewable primary energy resources	MJ	4,60E+03	1,05E+01	0*	8,75E-01	4,57E+03	1,14E+01	-8,18E+00	
Contribution to use of secondary material	kg	3,22E-02	3,22E-02	0*	0*	0*	0*	0,00E+00	
Contribution to use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to net use of freshwater	m³	1,54E-01	3,84E-03	4,09E-05	8,36E-04	1,48E-01	1,56E-03	-3,96E-03	
Contribution to hazardous waste disposed	kg	5,74E+00	2,31E+00	0*	9,94E-04	3,35E+00	7,25E-02	-8,61E+00	
Contribution to non hazardous waste disposed	kg	2,66E+01	4,39E-01	0*	2,73E-01	2,58E+01	8,66E-03	-6,18E-01	
Contribution to radioactive waste disposed	kg	5,51E-03	6,29E-05	6,88E-06	3,67E-05	5,41E-03	7,41E-07	-1,42E-04	
Contribution to components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to materials for recycling	kg	1,01E-01	0*	0*	4,62E-02	0*	5,52E-02	0,00E+00	
Contribution to materials for energy recovery	kg	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to exported energy	MJ	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to biogenic carbon content of the product	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	
Contribution to biogenic carbon content of the associated packaging	kg de C	0,00E+00	0*	0*	0*	0*	0*	0,00E+00	

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00978-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH48	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	2023/06	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal External X			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

SCHN-00978-V01.01-EN

Published by Schneider Electric

©2023 - Schneider Electric – All rights reserved

2023/06