



piconet Uitbreidingsmodule voor IP-Link
8 digitale pnp ingangen filter 3 ms
8 digitale uitgangen 0,5 A
SNNE-0808D-0003

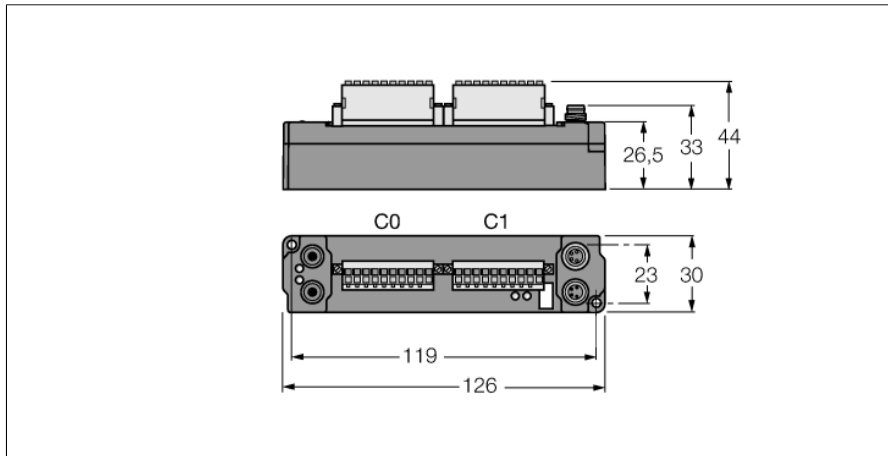


Type	SNNE-0808D-0003
Ident no.	6824473
Aantal kanalen	16
Bedrijfs-/lastspanning	20...29 VDC
Bedrijfsstroom	≤ 25 mA
Lengte lichtgeleider	≤ 15 m
Kanalenaantal	8 digitale ingangen volgens EN 61131-2
Ingangsspanning	20...29 VDC uit bedrijfsspanning
Signaalspanning Low Level	-3 tot 5 VDC (EN 61131-2, type 2)
Signaalspanning High Level	11 tot 30 VDC (EN 61131-2, type 2)
Ingangsvertraging	3 ms
max. ingangsstroom	6 mA
Kanalenaantal	8 digitale uitgangen volgens EN 61131-2
Uitgangsspanning	20...29 VDC uit lastspanning
Uitgangsstroom per kanaal	0,5 A, kortsluitvast
Belastingstype	ohmsch, inductief, lampbelasting
Schakelfrequentie	≤ 500 Hz
Gelijktijdigheidsfactor	1
Afmetingen (B x L x D)	30 x 126 x 26.5mm
Vibratietest	Volgens EN 60068-2-6
Schoktest	volgens EN 60068-2-27
Elektromagnetische compatibiliteit	Volgens EN 61000-6-2/EN 61000-6-4
Beschermingsgraad	IP67
Certificaten	CE, cULus

- Directe aansluiting op de IP-link
- IP20 klemmen met trekveeraansluiting
- glasvezelversterkte PA6-behuizing
- vergoten module-elektronica
- Metalen ronde connector
- beschermingsgraad IP20


ingang IP20 klem

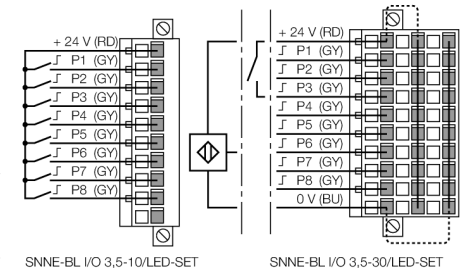

uitgang IP20 klem

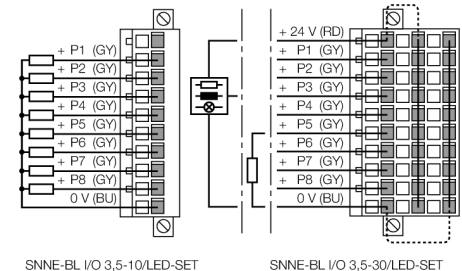

spanningsvoeding M8 x 1



piconet Uitbreidingsmodule voor IP-Link
8 digitale pnp ingangen filter 3 ms
8 digitale uitgangen 0,5 A
SNNE-0808D-0003

LED's

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	1...8	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	1...8	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

data in de procesafbeelding

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P4	C0P3	C0P2	C0P1	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
	Output	Byte n	C1P4	C1P3	C1P2	C1P1				
	Input	Byte n+1	is used by the physically following bit-oriented extension module connected via the IP Link.				C0P8	C0P7	C0P6	C0P5
	Output	Byte n+1					C1P8	C1P7	C1P6	C1P5
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is activated. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P8	C0P7	C0P6	C0P5	C0P4	C0P3	C0P2	C0P1
	Output	Byte n	C1P8	C1P7	C1P6	C1P5	C1P4	C1P3	C1P2	C1P1
C... = Connector no. – P... = Pin no.										

Toebehoren

Type	Ident no.	housing	clamping point	clamping range	signal LEDs	degree of protection
SNNE-BL I/O 3,5-10/LED-SET	6824475	1-row	10	0,5...1,5 mm²	yes	IP20
SNNE-BL I/O 3,5-30/LED-SET	6824474	3-row	30	0,5...1,5 mm²	yes	IP20