## LED Horn WM Contin. tone 24VAC/DC BU



Part No.: 435.510.75



Vidth 2 Height 4	144 mm 134 mm 407 mm
Height	
	407 mm
Jiameter	
Junicici .	134 mm
	PC PC/ABS
Dome colour E	Blue
Housing colour	Grey
Protection category I	IP65
Connection	Screw terminals
cross-sectional area maximum	1,50mm² / 16AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 13 mm
Fension relief	Present (conforms to VDE)
۲ype of fixing ۲	Wall mounting
Norking temperature minimum -	-30°C
Norking temperature maximum -	+50°C
Neight with packaging	727 g
Product weight 6	610 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance -	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	275 mA
Rated inrush current	650 mA
Protection class	Protection class 2
Pollution degree	3
OPTICAL DATA	
light source	LED
ight colour B	Blue
Optical signal image	Revolving
Service life optical	50,000 h maximum

## **ACOUSTIC DATA**

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


## LED Horn WM Contin. tone 24VAC/DC BU

Volume (max) at 1m distance	108,0 dB (A)
Acoustic signal image	Continuous tone
Audio frequency	110 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

## LED Horn WM Contin. tone 24VAC/DC BU

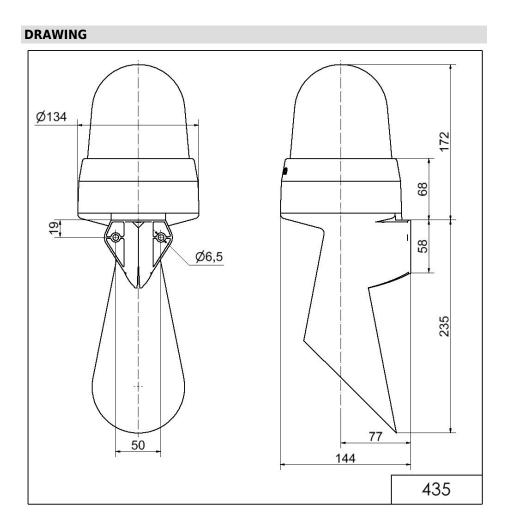

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.