


## Midi

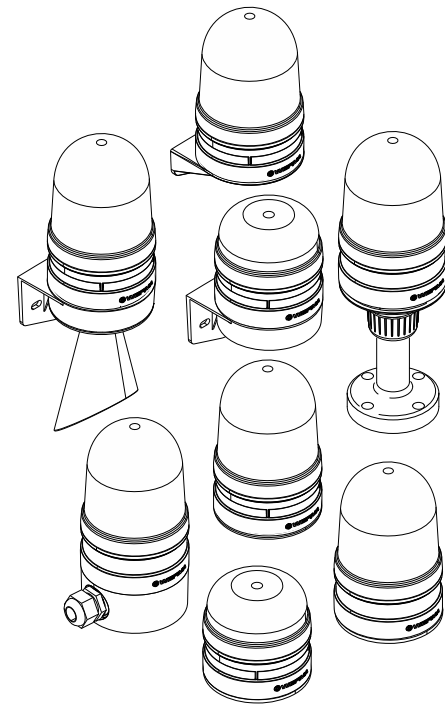

**DANGER**

**⚠️ ⚡ ⚠️**

ⒹE Anschluss **ausschließlich** durch ausgebildete Elektro-Fachkräfte.

ⒼB Electrical connection is to be made by trained electrical specialists **only**.

ⒻR Le branchement doit **uniquement** être effectué par des professionnels.

ⒾT Il collegamento deve essere eseguito **solo** da elettricisti specializzati.

ⒺS La conexión **sólo** debe ser realizada por electricistas debidamente formados.

⒫T A ligação deve ser feita **exclusivamente** por profissional elétrico especializado.

ⒹL De aansluiting mag **enkel** gebeuren door erkende vakmensen.

ⒸZ Připojení smí **provádět** pouze kvalifikovaný personál.

⒫L Podłączenie **wyłącznie** przez specjalistów-elektryków.

ⒻI Liittäminen kuuluu **ainoastaan** koulutettujen sähköalan ammattilaisten tehtäviin.

⒲U Подключение проводится только специалистом-электриком.

ⒻR Bağlantı **sadece** eğitimli elektrik teknisyenleri tarafından yapılmalıdır.

ⒸN 布线需由专业电工执行

**⚠️ ⚡ ⚠️**

**⚠️** 110 db

**⚠️** IP 66

161 / 461

**⚠️** IP 66

**⚠️** **⚡** **⚠️**

**DANGER EVS** TwinFLASH

ⒹE Bei Epilepsie ungeeignet!

ⒼB Unsuitable for epilepsy sufferers.

ⒻR Ne convient pas aux personnes souffrant d'épilepsie.

ⒾT Inadatto per epilettici.

ⒺS Inadecuado para epilépticos.

⒫T Não aconselavel a pessoas que sofrem de Epilepsia.

ⒹL Niet geschikt voor epileptici.

ⒸZ Nevhodné pro epileptiky.


⒫L Nie stosować przy zchorzeniu padaczki.

ⒻI Ei sovellu epileptikoille.

⒲U Не подходит для страдающих эпилепсией.







ⒻR Epilepsi hastalığı olanların kullanmaması önerilir.

ⒸN 不适用于癫痫病患者

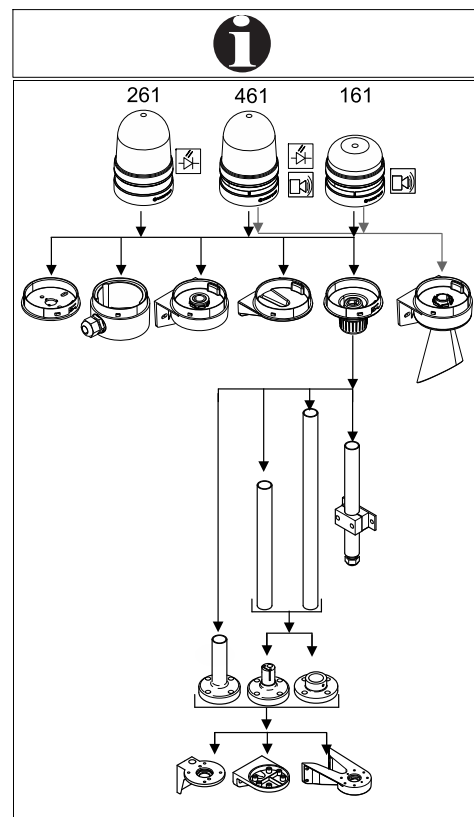




TwinLIGHT	261 x10 70	12V/24V ≈	<175 mA
	261 x10 60	115V/60Hz - 230V/50Hz	< 65 mA
TwinFLASH	261 x20 70	12V/24V ≈	<150 mA
	261 x20 60	115V/60Hz - 230V/50Hz	<100 mA
TriColour	261 430 70	12V/24V ≈	<135 mA
	261 430 60	115V/60Hz - 230V/50Hz	< 50 mA
LED Rotating	261 x40 70	12V/24V ≈	<120 mA
	261 x40 60	115V/60Hz - 230V/50Hz	<100 mA
TwinLIGHT	461 x10 70	12V/24V ≈	<290 mA
	461 x10 60	115V/60Hz - 230V/50Hz	<150 mA
TwinFLASH	461 x20 70	12V/24V ≈	<290 mA
	461 x20 60	115V/60Hz - 230V/50Hz	<205 mA
	161 700 70	12V/24V ≈	<135 mA
	161 700 60	115V/60Hz - 230V/50Hz	<105 mA

- 1
- 1a - 261 700 01
  - 1b - 261 700 02
  - 1c - 261 700 06
  - 1d - 261 700 07
  - 1e - 261 700 03
  - 1f - 261 700 05

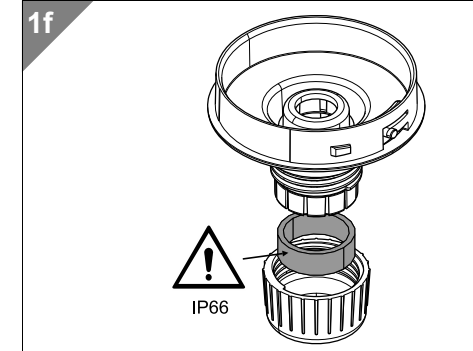
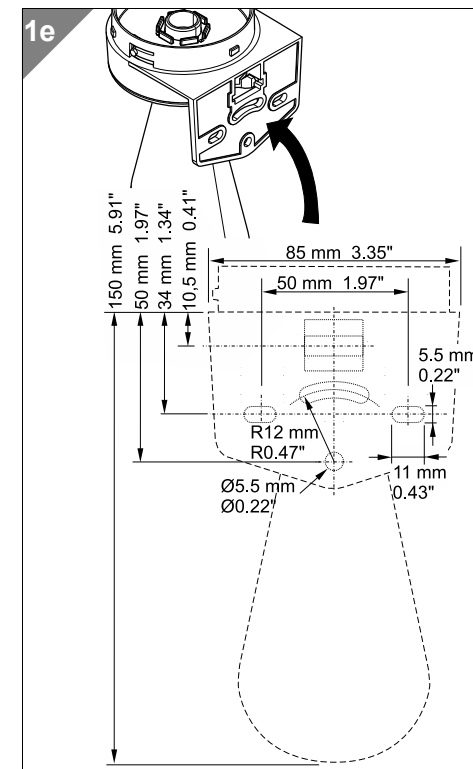
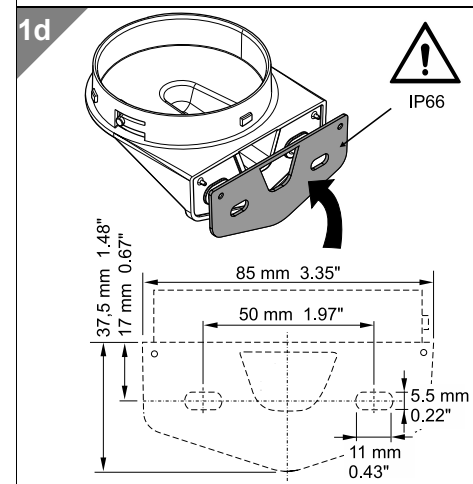
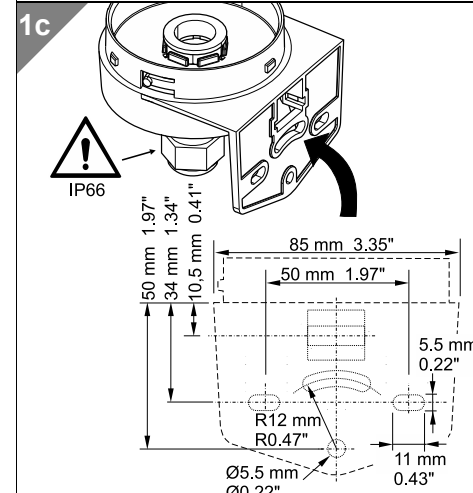
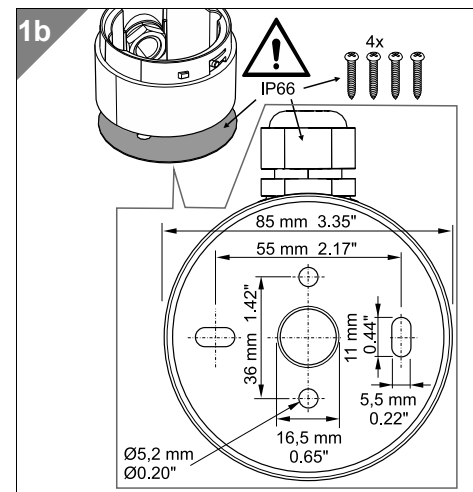
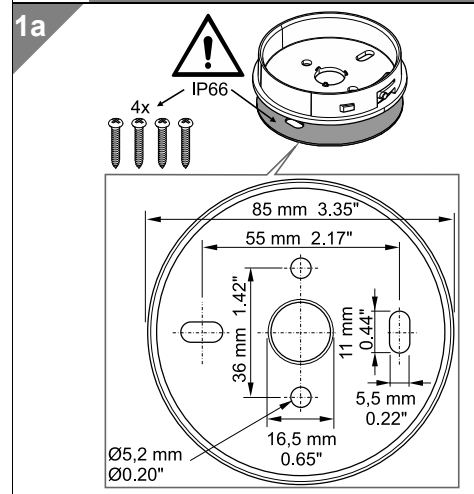


- 2
- 2a - 261 700 01, 261 700 05, 261 700 07
  - 2b - 261 700 02, 261 700 03
  - 2c - 261 700 06


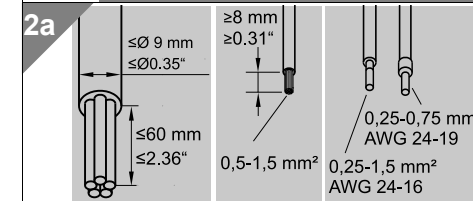


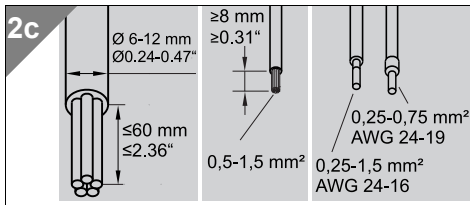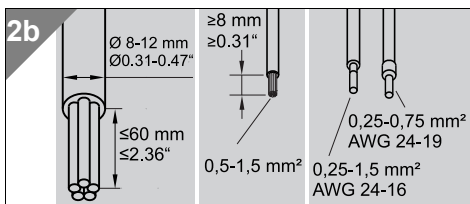

- 3**
- 3a - 261 700 01
  - 3b - 261 700 02
  - 3c - 261 700 06
  - 3d - 261 700 07
  - 3e - 261 700 03
  - 3f - 261 700 05

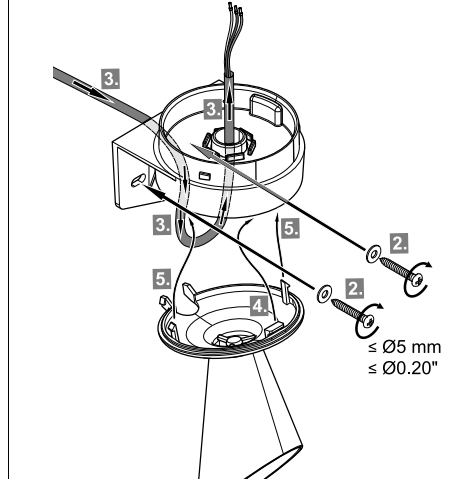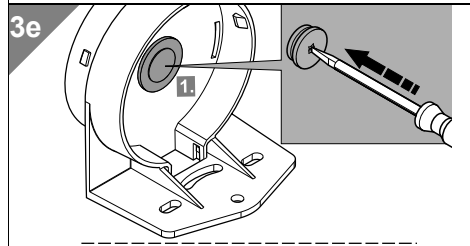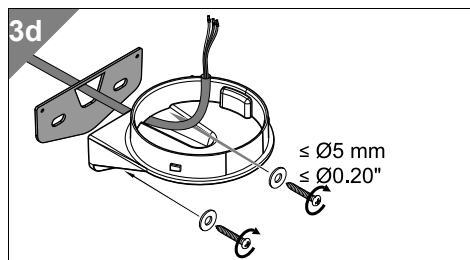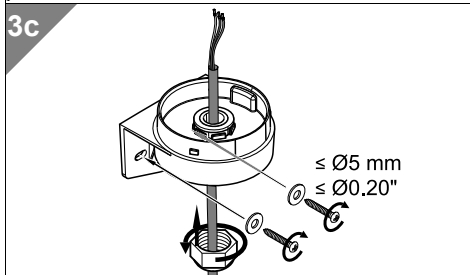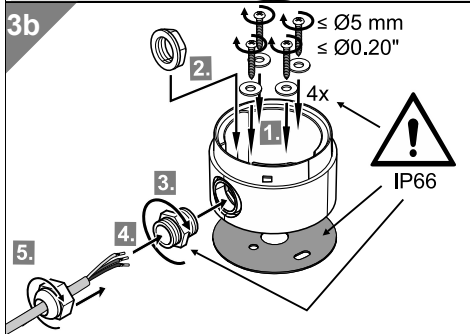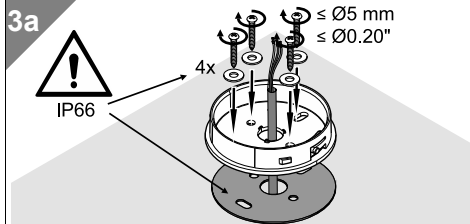


**⚠ DANGER**

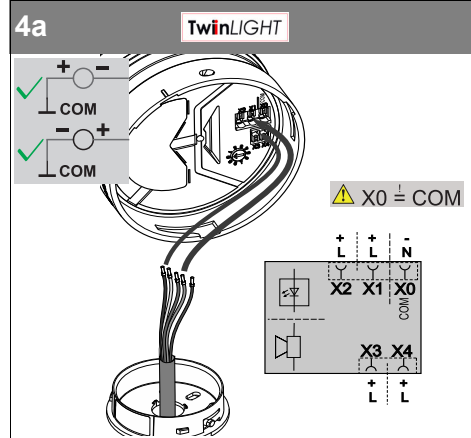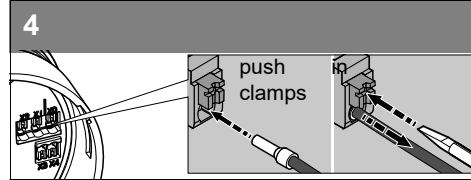

LED	X2	X1	X0 (COM)	Function
		•	•	permanent
	•		•	blinking


TONE	X3	X4	X0 (COM)	Function
	•		•	🔊
		•	•	🔊

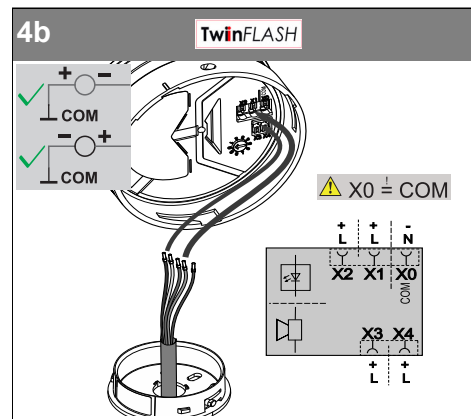


LED	X2	X1	X0 (COM)	Function
		•	•	flashing
	•		•	EVS

TONE	X3	X4	X0 (COM)	Function
	•		•	🔊
		•	•	🔊

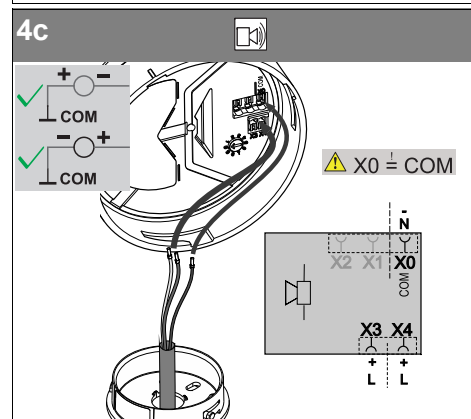


TONE	X3	X4	X0 (COM)	Function
	•		•	🔊
		•	•	🔊

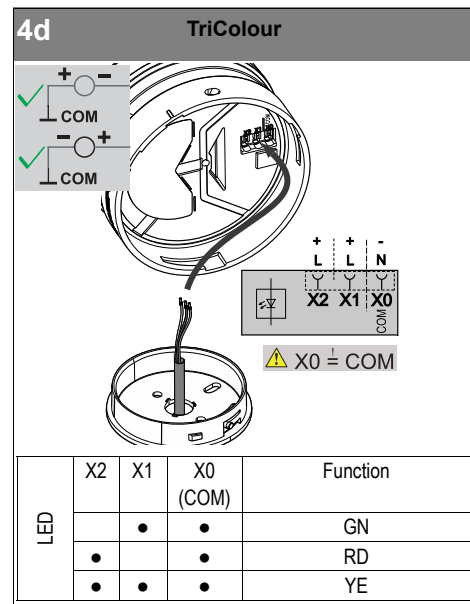

LED	X2	X1	X0 (COM)	Function
		•	•	GN
	•		•	RD
		•	•	YE

**4e LED Rotating**

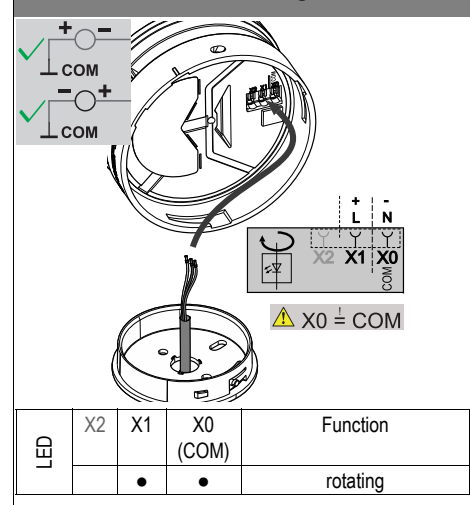


LED	X2	X1	X0 (COM)	Function
		•	•	rotating

**5**

**NOTICE**  
dB = dB A (SPL) 1m

Tone	[dB]	[dB]
0 110 Hz	107	99
1 3.3 kHz	106	101
2 1Hz 3.3 kHz	110	101
3 20Hz 3.3 kHz	110	101
4 1Hz 970 Hz 800 Hz	95	94
5 7Hz 2.85 kHz 2.40 kHz	99	92
6 1Hz 1200 Hz 500 Hz	101	93
7 1Hz 1200 Hz 800 Hz	100	92
8 0.5 Hz 4.1 kHz 2.1 kHz	110	101
9 700 Hz	97	92

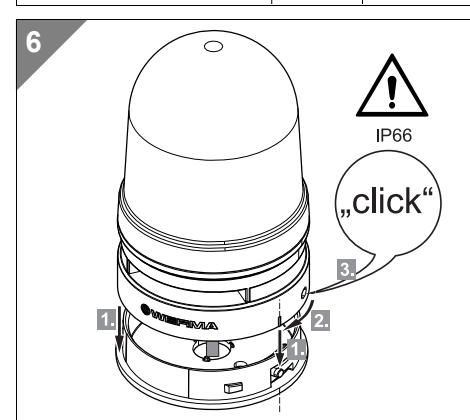

15000000129\_AD  
310.261.002



© DE