


MEGA LATERNE F

612166.004.1.730 | Bollards



Bollards
4051859933694
D 115, H 750

free-standing
silver, matt (approx. RAL 9006)

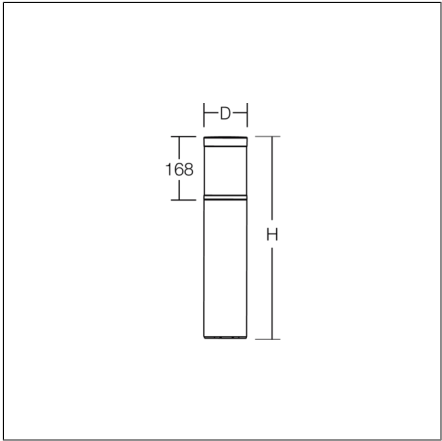

Attractive cylindrical bollard with innovative housing design and high-quality LED optics. Luminaire tube Ø 115 mm made of corrosion-resistant aluminium profile, powder coated. Recessed stainless steel fixing plate. Non-corrosive gear compartment made of mould-cast dual compound thermoplastic with integral TP gasket. With membrane valve to avoid condensation. Seawater resistant coating. Luminaire head made of die cast aluminium, powder-coated, with opal cylinder (glass). The robust stainless steel mounting base ensures long-term stability. Elongated holes in the base for subsequent and simple alignment of the luminaire. Driver integrated. Delivered with pre-installed connecting cable. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

Product specifications

Diameter D	115 mm
Height H	750 mm
Weight	3.85 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	660 lm
System power	10 W
System efficiency	66 lm/W
Glare evaluation UGR (4H 8H)	21,1
Beam angle	down 180° up 180°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	80
Luminaires on B16A fuse	130
Inrush current / Inrush current duration	5 A / 100 µs
CIE Flux Code / CEN Flux Code	13 39 69 50 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK05
Ambient temperature	-20 °C ... + 45 °C
Conformity mark	CE, EAC

MEGA LATERNE F

612166.004.1.730 | Bollards



Accessories



982103.000
Accessory for ground installation



982981.003
Junction box H with strain relief.



982974.003

Spareparts



982262.014
Luminaire head, silver