


# DEECOS S mini track-in

742259.002.2.730 | Surface mounted projector



Surface mounted projectors  
4051859814634  
D 87, H 135

Track on ceiling, Wall track  
traffic white, matt (RAL 9016)

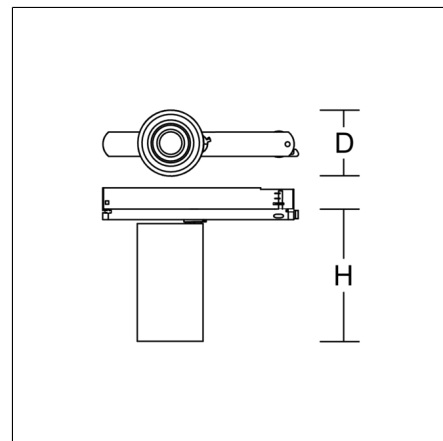

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index Ra>90. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adapter. High quality converter without flickering and stroboscopic effect. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

## Product specifications


|                                              |                          |
|----------------------------------------------|--------------------------|
| Diameter D                                   | 87 mm                    |
| Height H                                     | 135 mm                   |
| Weight                                       | 0.62 kg                  |
| Light source                                 | LED                      |
| Colour temperature                           | 2700 K                   |
| Rated luminous flux                          | 3300 lm                  |
| System power                                 | 29 W                     |
| System efficiency                            | 114 lm/W                 |
| Glare evaluation UGR (4H 8H)                 | 15,4                     |
| Beam angle                                   | 31°                      |
| Rated life                                   | 50000 h (L90/B10)        |
| Colour rendering index (CRI)                 | 92                       |
| Colour tolerance                             | 2                        |
| Photobiological safety according to EN 62471 | Risk group 1             |
| Driver                                       | Converter, dimmable      |
| Control                                      | smart+free (Bluetooth)   |
| Voltage                                      | 220 - 240 V / 50 - 60 Hz |
| Luminaires on B10A fuse                      | 17                       |
| Luminaires on B16A fuse                      | 27                       |
| Luminaires on C10A fuse                      | 28                       |
| Luminaires on C16A fuse                      | 44                       |
| Inrush current / Inrush current duration     | 18 A / 2 µs              |
| CIE Flux Code / CEN Flux Code                | 99 100 100 100 100       |
| Type of protection                           | IP 20                    |
| Protection class                             | II                       |
| Filament test                                | 650°C - 30 seconds       |
| Impact resistance                            | IK06                     |
| Ambient temperature                          | 25 °C                    |
| Conformity mark                              | CE, EAC                  |

# DEECOS S mini track-in


742259.002.2.730 | Surface mounted projector




## Accessories



982370.000  
Diffuser, transparent



982370.010  
Diffuser, satinated



982371.003  
Anti-glare honeycomb louvre



982369.003  
Spot lens



982369.013  
Medium lens




982369.023  
Flood lens



982421.002  
White plastic ring for lens.




982368.003  
Reflector spot




982368.013  
Reflector medium



982368.023  
Reflector flood



982369.033  
Wide flood lens



982369.043  
Oval corridor lens



982419.002  
White plastic ring for reflector.



982368.033  
Reflector wide flood



982647.002  
Decorative glass opal matt



982648.002  
Decorative glass opal matt