


# TX-MOVE

901738.004 | Recessed projectors



Recessed projectors  
4051859927006  
L 622, B 190, H 39

Lay-in luminaires  
silver, matt (approx. RAL 9006)

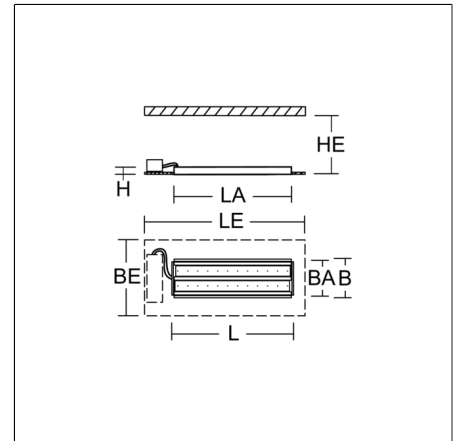

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. 2xSwivel range: 90°. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Spezielle Mikrostrukturen reduzieren Gelbsaum. Asymmetrical light distribution. Suitable for laying in grid ceiling module 625. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

## Product specifications

|                                              |                               |
|----------------------------------------------|-------------------------------|
| Length L                                     | 622 mm                        |
| Width B                                      | 190 mm                        |
| Height H                                     | 39 mm                         |
| Cut-out length LA                            | 602 mm                        |
| Cut-out width BA                             | 174 mm                        |
| Installation space length LE                 | 700 mm                        |
| Installation space width BE                  | 390 mm                        |
| Installation space height HE                 | 100 mm                        |
| Weight                                       | 3.55 kg                       |
| Light source                                 | LED                           |
| Colour temperature                           | 3000 K                        |
| Rated luminous flux                          | 5250 lm   6800 lm   9250lm    |
| System power                                 | 35 W   47 W   68W             |
| System efficiency                            | 136 lm/W   145 lm/W   150lm/W |
| Glare evaluation UGR (4H 8H)                 | 26,2   27,1   28,2            |
| Beam angle                                   | 73°/100°                      |
| Rated life                                   | 50000 h (L80/B10)             |
| Colour rendering index (CRI)                 | 80                            |
| Colour tolerance                             | 3                             |
| Photobiological safety according to EN 62471 | Risk group 1                  |
| Driver                                       | Converter                     |
| Control                                      | on/off                        |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz    |
| Luminaires on B10A fuse                      | 10                            |
| Luminaires on B16A fuse                      | 17                            |
| Luminaires on C10A fuse                      | 17                            |
| Luminaires on C16A fuse                      | 28                            |
| Inrush current / Inrush current duration     | 9 A / 65 µs                   |
| CIE Flux Code / CEN Flux Code                | 64 90 98 100 100              |
| Type of protection                           | IP 20 on room side<br>IP 20   |
| Protection class                             | I                             |
| Filament test                                | 850 °C                        |
| Impact resistance                            | IK04                          |
| Ambient temperature                          | 5 °C ... + 25 °C              |
| Conformity mark                              | CE                            |

# TX-MOVE

901738.004 | Recessed projectors



## Accessories



982869.004

Mounting frame for installation in suspended ceilings.