


# CENTRYXX IP65

672282.002.1.04 | Stand-by luminaires for escape route illumination



Ceiling luminaires  
4051859216841  
L 198, B 198, H 38

Ceiling mounting  
white

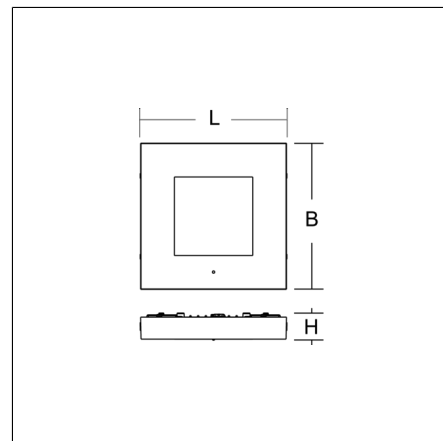

Flat, square surface-mounted luminaire. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for area lighting. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected. Ball impact proof in accordance with DIN 18032-3. Qualified for use in the food and drink industry.

## Product specifications

Typ of emergency lighting	<b>Self-contained system</b>
Monitoring	<b>MultiDigit</b>
Battery	<b>NiMh</b>
Duration	<b>8 h</b>
Operating mode	<b>maintained power mode</b>
Length L	<b>198 mm</b>
Width B	<b>198 mm</b>
Height H	<b>38 mm</b>
Weight	<b>1.04 kg</b>
Light source	<b>LED</b>
Colour temperature	<b>6500 K</b>
Rated luminous flux, mains operation	<b>460 lm</b>
System power, mains operation	<b>6,4 W</b>
Rated luminous flux, emergency operation	<b>130 lm</b>
System efficiency	<b>72 lm/W</b>
Glare evaluation UGR (4H 8H)	<b>22,5</b>
Beam angle	<b>117°/118°</b>
Colour rendering index (CRI)	<b>70</b>
Photobiological safety according to EN 62471	<b>Risk group 2</b>
Driver	<b>Electronic ballast</b>
Control	<b>on/off</b>
Voltage	<b>220 - 240 V / 50 Hz, 60 Hz</b>
Luminaires on B10A fuse	<b>30</b>
Luminaires on B16A fuse	<b>40</b>
Luminaires on C10A fuse	<b>30</b>
Luminaires on C16A fuse	<b>40</b>
Inrush current / Inrush current duration	<b>0.12 A / 5000 µs</b>
CIE Flux Code / CEN Flux Code	<b>51 94 100 100 100</b>
Type of protection	<b>IP 65</b>
Protection class	<b>I</b>
Filament test	<b>850 °C</b>
Impact resistance	<b>IK08</b>
Ambient temperature for maintained power	<b>5 °C ... + 30 °C</b>
Ambient temperature for non-maintained power mode	<b>5 °C ... + 30 °C</b>
Safety marks	<b>D-mark</b>
Conformity mark	<b>CE</b>

# CENTRYXX IP65

672282.002.1.04 | Stand-by luminaires for escape route illumination

## Accessories



982274.002  
Mounting set for through wiring surface installation



982257.002  
Frame attachment



982341.002  
Mounting kit for chains/cable suspensions



982425.002.04  
Pendant tube set