

GW97772

10 to 70 mm²
8 to # 00 AWG
6 to 50 mm²
10 to # 0 AWG
15 mm / 0,59"

Hexagonal Metric
Allen size 4
44,1 lb-in 5,0 Nm

OK

GW97773

0,5 to 2,5 mm²
20 to # 14 AWG
0,5 to 1,5 mm²
20 to # 16 AWG
6 mm / 0,236"

Slotted head 3,0 mm
4,4 lb-in 0,5 Nm

Hexagonal Metric
Allen size 4
44,1 lb-in 5,0 Nm

Slotted head 3,5 mm
3,97 lb-in 0,45 Nm

Slotted head 3 mm
3,97 lb-in 0,5 Nm

OK

GW97775

0,5 to 1,5 mm²
20 to # 14 AWG
0,5 to 1,0 mm²
20 to # 16 AWG
6 mm / 0,236"

10 to 70 mm²
8 to # 00 AWG
6 to 50 mm²
10 to # 0 AWG
15 mm / 0,59"

0,5 to 2,5 mm²
20 to # 14 AWG
0,5 to 1,5 mm²
20 to # 16 AWG
6 mm / 0,236"

Slotted head 3,5 mm
3,97 lb-in 0,45 Nm

Hexagonal Metric
Allen size 4
44,1 lb-in 5,0 Nm

Slotted head 3 mm
3,97 lb-in 0,5 Nm

OK

GW97774

0,5 to 2,5 mm²
20 to # 14 AWG
0,5 to 1,5 mm²
20 to # 16 AWG
6 mm / 0,236"

Slotted head 3,0 mm
4,4 lb-in 0,5 Nm

Posidriv PZ2
8,8 lb-in 1 Nm

Posidriv PZ2
8,8 lb-in 1 Nm

2 MAX

OK

hygrometry :
* 80% humidity without condensation at 5° C
* 95% humidity with condensation at 40° C

altitude :
max 2 000 m without de-rating

temperature :
* -10 +40°C without de-rating
* -20 +70°C with de-rating

mass : 5 kg

storage :
* temperature -20 to +70°C
* period : 1 year max

Ai sensi dell'articolo 9 comma 2 della Direttiva Europea 2004/108/CE e dell'articolo R2 comma 6 della Decisione 768/2008/CE si informa che responsabile dell'immissione del prodotto sul mercato Comunitario è:
According to article 9 paragraph 2 of the European Directive 2004/108/EC and to article R2 paragraph 6 of the Decision 768/2008/EC, the responsible for placing the apparatus on the Community market is:
GEWISS S.p.A Via A. Volta, 1 - 24069 Cenate Sotto (BG) Italy Tel: +39 035 946 111 Fax: +39 035 946 270 E-mail: qualitymarks@gewiss.com

GW97774

0,5 to 2,5 mm²
20 to # 14 AWG
0,5 to 1,5 mm²
20 to # 16 AWG
6 mm / 0,236"

Slotted head 3,0 mm
4,4 lb-in 0,5 Nm

Posidriv PZ2
8,8 lb-in 1 Nm

Posidriv PZ2
8,8 lb-in 1 Nm

2 MAX

OK

OK

Posidriv PZ2

STEP 1

Posidriv PZ2

STEP 2

STEP 3

Posidriv PZ2
2,2 lb-in 0,25 Nm

STEP 4

OK!

340
324
116
13, 26
143
18
245
45
46
53
73,5
MAX : 2

340
52
104
176
131,5
131,5
6 x M6 22 lb-in 2,5 Nm

RAIL IEC 60715

Posidriv PZ2
8,8 lb-in 1 Nm

OK OK OK OK OK OK



OPERATION

AUT


Click

Hexagonal Metric
Allen size 5
Max 88,2 lb-in 10 Nm

4 mm min
3/16" min
8 mm max
5/16" max

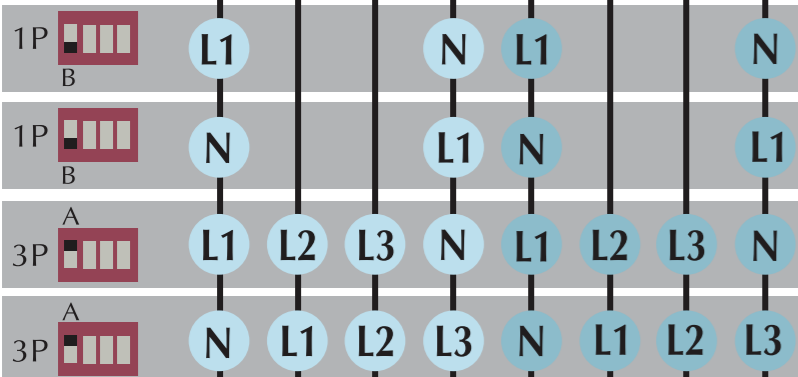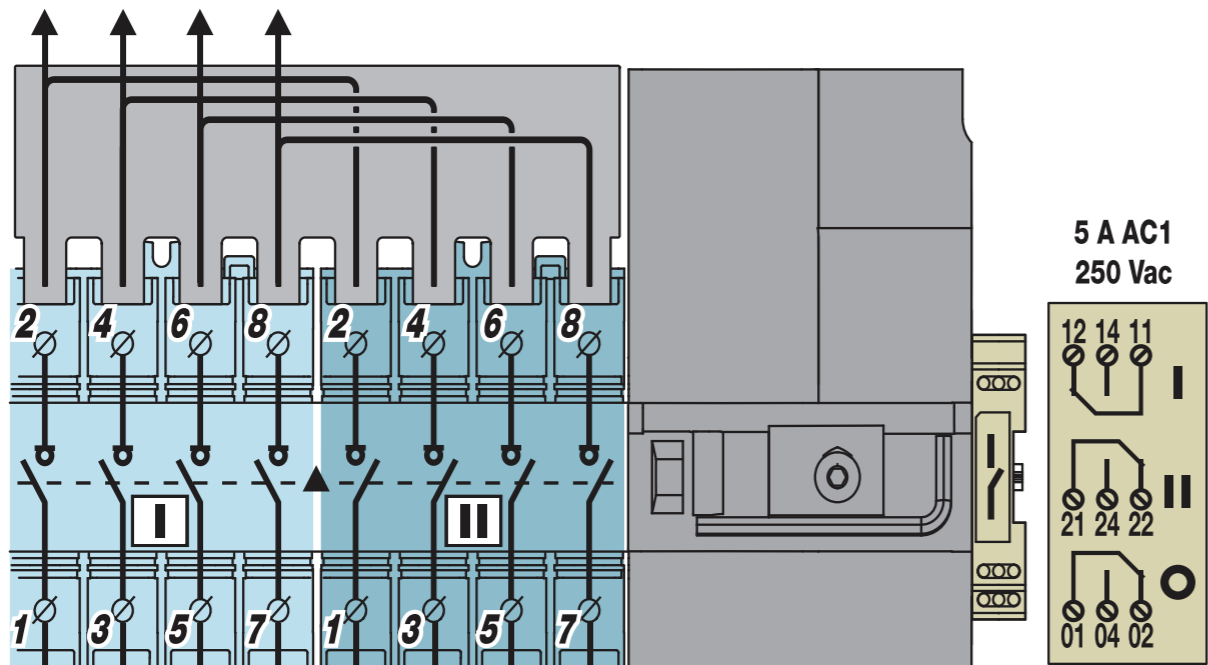

230/400 Vac Network

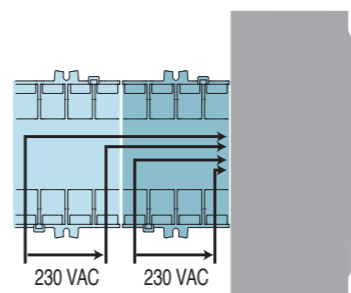

U = 176-288 Vac 45-65 Hz

2A 30Vdc DC1 0,5A 230Vac AC1 max 60W or 250VA	1A 125Vac AC1	2A 30Vdc DC1 0,5A 230Vac AC1 max 60W or 250VA	1A 125Vac AC1
OK	NOK	START	STOP

STEP 1

STEP 2

STEP 3

STEP 4

