


FLAT SLIM step

672674.002 |



Ceiling and wall luminaires
4051859982258
D 450, H 70

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

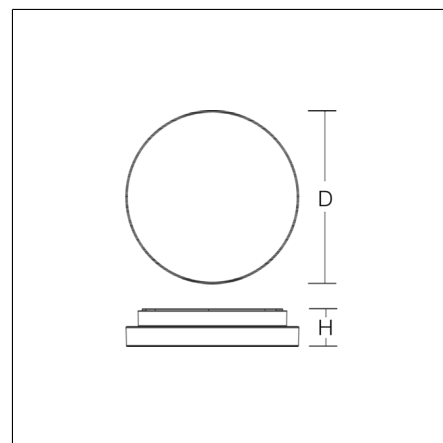

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Electronic ballast included. Self-contained system with automatic self-test.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Diameter D	450 mm
Height H	70 mm
Weight	4.7 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 2450 lm 4000 lm
	4000 K: 2550 lm 4150 lm
System power, mains operation	3000 K: 26 W 41 W
	4000 K: 26 W 41 W
Rated luminous flux, emergency operation	150 lm
System efficiency	3000 K: 94 lm/W 98 lm/W
	4000 K: 98 lm/W 101 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 20,5 22,2
	4000 K: 20,6 22,3
Beam angle	down 126° up 180°
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	41 71 90 79 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 25 °C
Safety marks	D-mark
Conformity mark	CE, EAC