

# Product Data Sheet

## GWD4827R

90 ReStart Range



Description Automatic reclosing device

Code ReStart Rd 2P

Coupled with GWD4827

Rated voltage AC 230 V

Rated current 40 A


No. modules 3

Standard EN 50557

Rated frequency (Hz) 50 - 60 Hz

|                                                         |                       |                                                                   |            |
|---------------------------------------------------------|-----------------------|-------------------------------------------------------------------|------------|
| Distribution system                                     | TT - TN-S             | Rated non-operating resistance between live parts and earth (Rdo) | 8kΩ        |
| Insulation voltage                                      | 500 V                 | Rated operating resistance between live parts and earth (Rd)      | 16 kΩ      |
| Rated impulse withstand voltage                         | 4 kV                  | Maximum operating frequency                                       | 30 oper./h |
| Overvoltage category                                    | III                   | Mechanical endurance                                              | 4000       |
| Dielectric strength test voltage between pole and earth | 2500 Vac for 1 minute | Type of residual current protection                               | A          |
| Rated residual operating current                        | 30 mA                 | Operating temperature                                             | -5 +40 °C  |
| Stocking temperature                                    | -40 +70 °C            | Automatic reclosure for untimely tripping                         | Yes        |
| Earth failure test                                      | Yes                   | Continuous system monitoring                                      | No         |
| Number of poles                                         | 2P                    | Electrocod                                                        | 1414       |
| Compatibility with WiFi interface                       | No                    |                                                                   |            |

### DIMENSIONAL

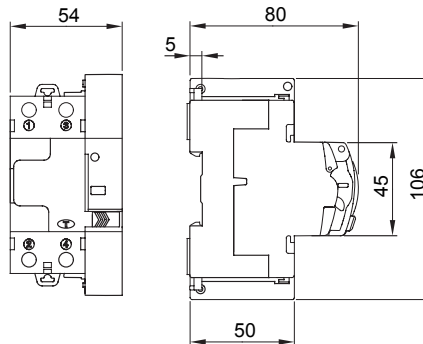

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

[www.gewiss.com](http://www.gewiss.com)  
[sat@gewiss.com](mailto:sat@gewiss.com)  
Last update 20/04/2023

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice