




Wall luminaires  
4051859991229  
L 344, B 144, H 78

Ceiling mounting, Wall (surface)  
white

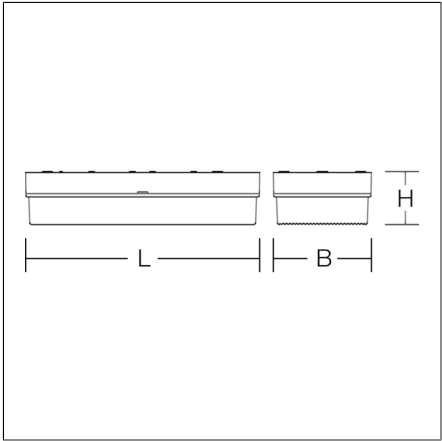

All-plastic luminaires, shockproof. For escape route identification or escape route illumination. Base: plastic (polycarbonate). Refractor: plastic (polycarbonate), transparent, prismatic. 4 legends for escape route identification included. Suitable for Ceiling mounting, Wall (surface). Pendant luminaire also possible with accessories. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	25 m
Length L	344 mm
Width B	144 mm
Height H	78 mm
Weight	0.97 kg
Light source	LED
Colour temperature	5700 K
System power, mains operation	4 W
Colour rendering index (CRI)	80
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Type of protection	IP 54
Protection class	I
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981167.002  
Ball impact guard