


FLAT POLYMERO KREIS SLIM

312087.002.4 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859155638
D 515, H 70

Ceiling mounting, Wall (surface)
white

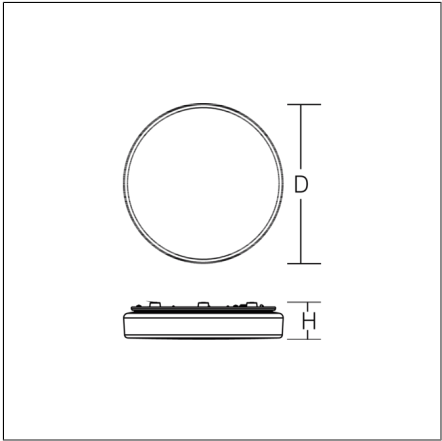

Flat decorative round LED surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shock-proof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	515 mm
Height H	70 mm
Weight	2.76 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3500 lm
System power	28 W
System efficiency	125 lm/W
Glare evaluation UGR (4H 8H)	20,8
Beam angle	down 123° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A / 10000 µs
CIE Flux Code / CEN Flux Code	42 73 92 86 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE

Spareparts



08-312087.022
Replacement diffuser