

# Axyl Opera

THORN

96700945 AXYL OPERA L WO 1L 930 MB HFX ANT

LED 15W AXYL_OP_L_MB930X	IP67	IK09	⊕	CE	
--------------------------	------	------	---	----	--


## Axyl Opera

AXYL Opera, a floor recessed, architectural LED luminaire for decorative facade lighting, with medium beam distribution. Class I electrical.. DALI-2 dimmable LED driver. , IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +45°C. Complete with 3000K LED..


Dimensions: 210 x 210 x 135 mm  
Luminaire input power: 15.2 W  
Luminaire luminous flux: 972 lm  
Luminaire efficacy: 64 lm/W  
Weight: 3.43 kg



TLG\_AXYL\_F\_OPERA\_L\_WO\_MB\_ANT.jpg

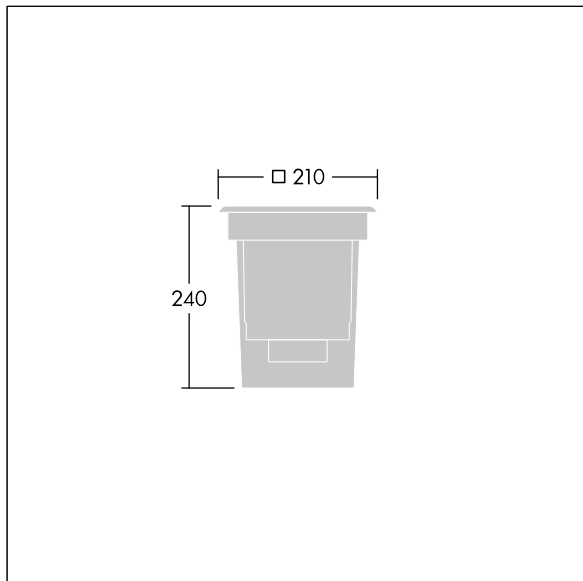

TLG\_AXYL\_M\_OPERA\_L.wmf

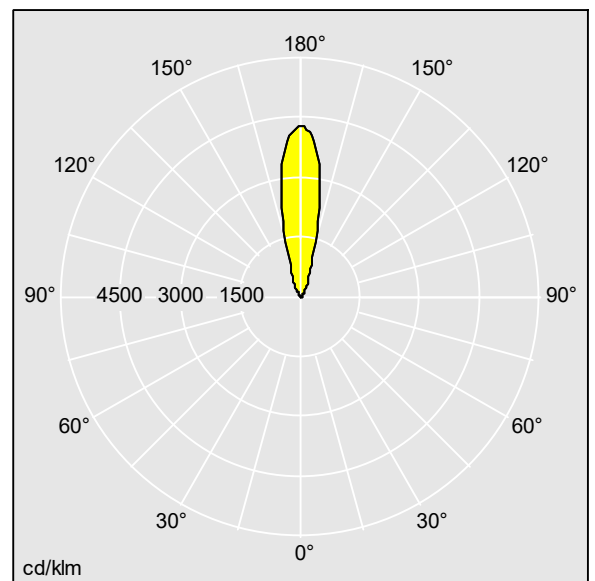

96700945.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 972 lm  
Luminaire efficacy\*: 64 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 15.2 W Power factor = 0.9  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting