


FLAT POLYMERO IP44

221154.002.1.191 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859182900
D 420, H 150

Ceiling mounting, Wall (surface)
white

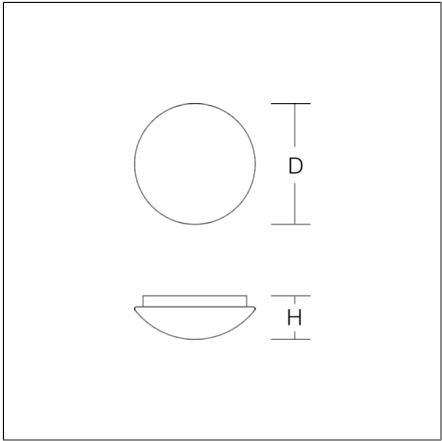

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: plastic. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: spring system. Suitable for Ceiling mounting, Wall (surface). Slave luminaire. Can only be operated in combination with corresponding master luminaire. IP 43 ceiling mounting, IP 44 wall mounting.

Product specifications


Diameter D	420 mm
Height H	150 mm
Weight	1.76 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1900 lm
System power	20 W
System efficiency	95 lm/W
Glare evaluation UGR (4H 8H)	19,5
Beam angle	down 118° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	87
Luminaires on B16A fuse	139
Luminaires on C10A fuse	87
Luminaires on C16A fuse	139
Inrush current / Inrush current duration	0.1 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 70 89 89 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO IP44

221154.002.1.191 | Ceiling and wall luminaires



Spareparts



08-5146.012
Replacement diffuser