



TL Mini consumer products

TL MINI 6W/33-640 1PP/10

They come in different wattages and colors with moderate (/33) to good (/827) light quality.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap-Base	G5 [G5]	Power (Nom)	6.0 W
Life To 10% Failures (Nom)	5000 h	Lamp Current (Nom)	0.160 A
Life to 50% Failures (Nom)	10000 h	Voltage (Nom)	42 V
Life to 50% Failures Preheat (Nom)	10000 h		
System Description	-	Controls and Dimming	
		Dimmable	Yes
Light Technical		Approval and Application	
Color Code	33-640	Energy Efficiency Label (EEL)	B
Luminous Flux (Nom)	260 lm	Mercury (Hg) Content (Nom)	4.4 mg
Color Designation	Cool White (CW)	Energy Consumption kWh/1000 h	7 kWh
Lumen Maintenance 10000 h (Nom)	58 %		
Lumen Maintenance 2000 h (Nom)	75 %	Product Data	
Lumen Maintenance 5000 h (Nom)	70 %	Full product code	871150062693625
Correlated Color Temperature (Nom)	4100 K	Order product name	TL Mini 6W/33-640 1PP/10
Luminous Efficacy (rated) (Nom)	43 lm/W	EAN/UPC - Product	8711500626936
Color Rendering Index (Nom)	60	Order code	62693625

TL Mini consumer products

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	928000503313
Net Weight (Piece)	21.000 g

ILCOS Code	FD-6/41/2B-E-G5
------------	-----------------


Dimensional drawing

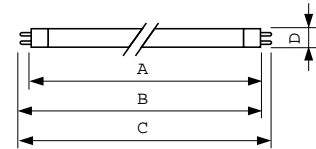


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL Mini 6W/33-640 1PP/10	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

TL Mini 6W/33-640

Photometric data

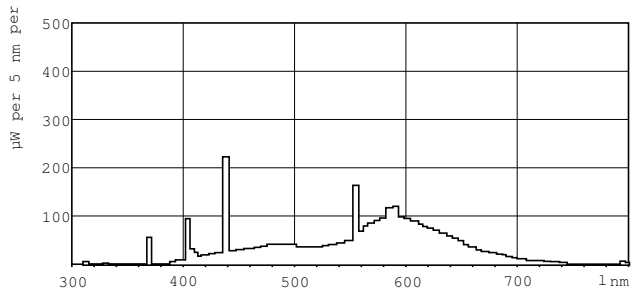

LDPB_TL-MINI_33-640-Spectral power distribution B/W

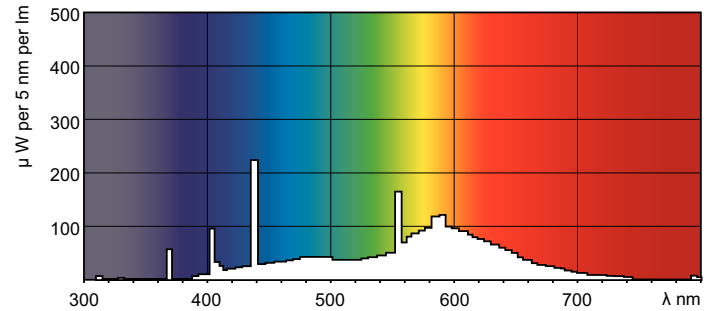

LDPO_TL-MINI_33-640-Spectral power distribution Colour

