


# TX-MOVE

## 901735.003.1 | Recessed projectors



Recessed projectors  
4051859935179  
L 597, B 190, H 39

Lay-in luminaires  
deep black, matt (RAL 9005)

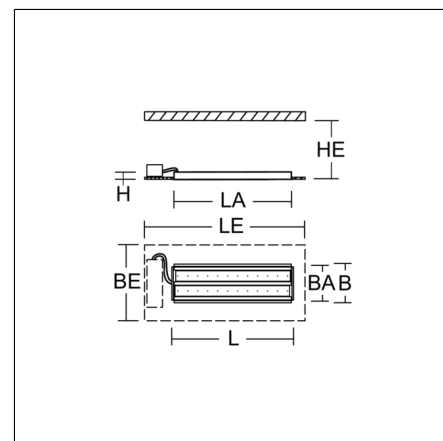

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. 2xSwivel range: 90°. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light emission. Suitable for laying in grid ceiling module 600. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

### Product specifications

|                                              |                               |
|----------------------------------------------|-------------------------------|
| Length L                                     | 597 mm                        |
| Width B                                      | 190 mm                        |
| Height H                                     | 39 mm                         |
| Cut-out length LA                            | 578 mm                        |
| Cut-out width BA                             | 174 mm                        |
| Installation space length LE                 | 675 mm                        |
| Installation space width BE                  | 390 mm                        |
| Installation space height HE                 | 100 mm                        |
| Weight                                       | 3.55 kg                       |
| Light source                                 | LED                           |
| Colour temperature                           | 4000 K                        |
| Rated luminous flux                          | 4900 lm   6450 lm   8750lm    |
| System power                                 | 35 W   47 W   68W             |
| System efficiency                            | 129 lm/W   137 lm/W   140lm/W |
| Glare evaluation UGR (4H 8H)                 | 28   29   30                  |
| Beam angle                                   | 112°                          |
| Rated life                                   | 50000 h (L80/B10)             |
| Colour rendering index (CRI)                 | 80                            |
| Colour tolerance                             | 3                             |
| Photobiological safety according to EN 62471 | Risk group 1                  |
| Driver                                       | Converter                     |
| Control                                      | on/off                        |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz    |
| Luminaires on B10A fuse                      | 10                            |
| Luminaires on B16A fuse                      | 17                            |
| Luminaires on C10A fuse                      | 17                            |
| Luminaires on C16A fuse                      | 28                            |
| Inrush current / Inrush current duration     | 9 A / 65 µs                   |
| CIE Flux Code / CEN Flux Code                | 47 79 96 100 100              |
| Type of protection                           | IP 20 on room side<br>IP 20   |
| Protection class                             | I                             |
| Filament test                                | 650 °C                        |
| Impact resistance                            | IK03                          |
| Ambient temperature                          | 5 °C ... + 25 °C              |
| Conformity mark                              | CE                            |

# TX-MOVE

901735.003.1 | Recessed projectors



## Accessories



982867.003

Mounting frame for installation in suspended ceilings.