

Axyl Glow

THORN


96700189 AXYL GLOW M U/D 6L930 WB HF ANT

LED 19W AXYL_GLOW_6M_930	IP65	IK06		CE	
--------------------------	------	------	---	----	--


Axyl Glow

Axyl Glow, a wall mounted, architectural LED luminaire for decorative facade lighting, 2 window with wide beam up and down distribution. Class II electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 90 x 200 x 72 mm
Luminaire input power: 18.8 W
Luminaire luminous flux: 678 lm
Luminaire efficacy: 36 lm/W
Weight: 1.77 kg

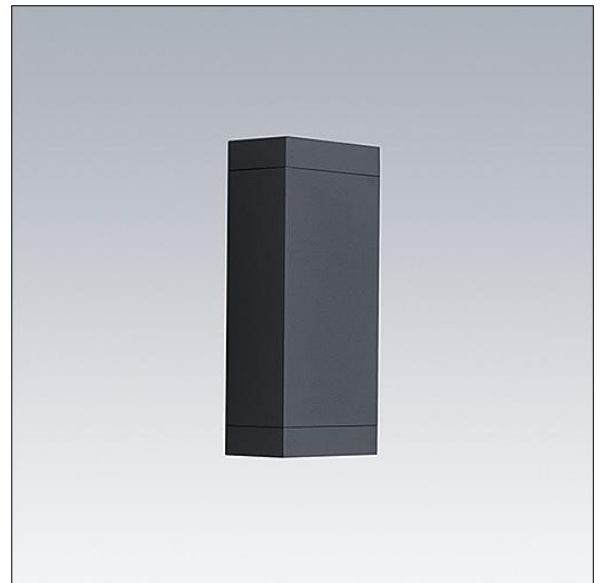

TLG_AXYL_F_GLOW_M_ANT.jpg

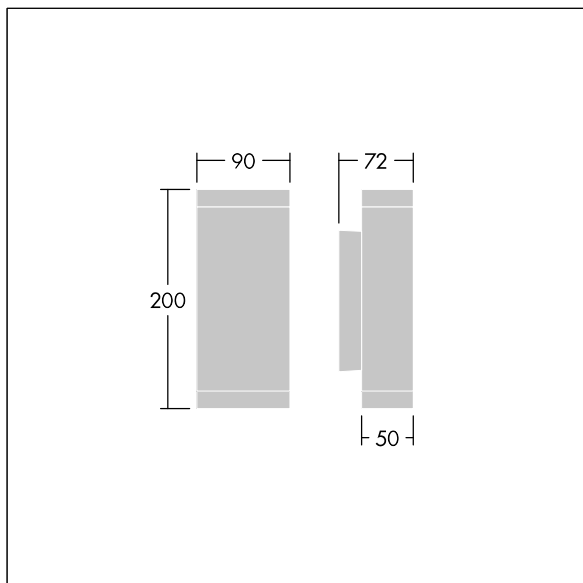

TLG_AXYL_M_GLOW_M_UD.wmf

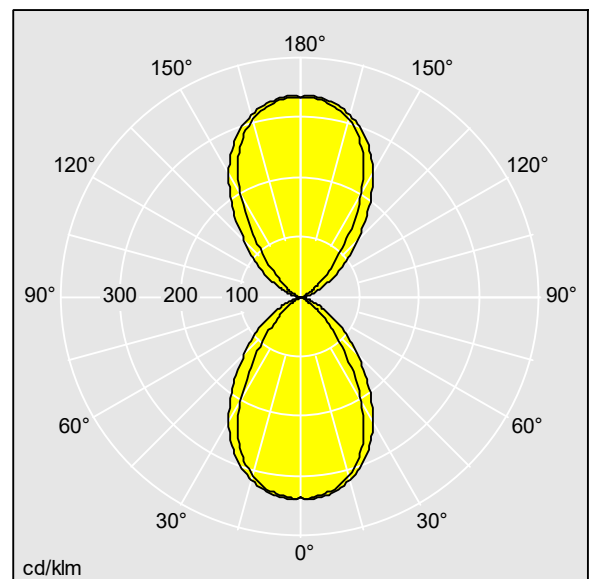

96700189.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 678 lm
Luminaire efficacy*: 36 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 18.8 W Power factor = 0.95
Dimming: FIX
LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting