


ROUNDED MAXI

672297.0031.1.89 | Combined luminaires for escape route illumination



Ceiling and wall luminaires
4051859227717
D 400, H 120

Ceiling mounting, Wall (surface)
anthracite metallic (DB703)

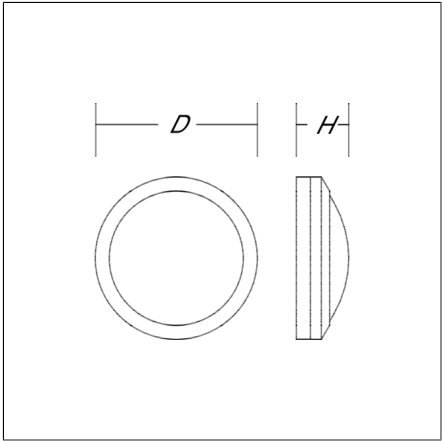

Round ceiling and wall luminaire with elegant appearance for outdoor use. For escape route illumination. Base and housing made of corrosion resistant pressure die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Diffuser: crystal glass (satin finish) with diffuser fixing. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Screwless cover fixing via bayonet lock with safety catch. Includes 1 anti-theft device. Mains connection 2 x 3 x 1.5 mm². Second cable inlet for loop through. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications


Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Diameter D	400 mm
Height H	120 mm
Weight	4.77 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	1050 lm
System power, mains operation	20 W
Rated luminous flux, emergency operation	280 lm
System power, emergency operation	6 W
System efficiency	53 lm/W
Glare evaluation UGR (4H 8H)	20,4
Beam angle	116°
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
CIE Flux Code / CEN Flux Code	43 74 91 97 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature for maintained power	-20 °C ... + 40 °C
Conformity mark	CE, EAC

ROUNDED MAXI

672297.0031.1.89 | Combined luminaires for escape route illumination



Accessories



982410.003
Theft protection

Spareparts



981212.002
Replacement glass