


SQ 600 LED 3700LM PLX I KL. IP20 592X592MM 840 (37W) RAL9005

DETAILED CARD

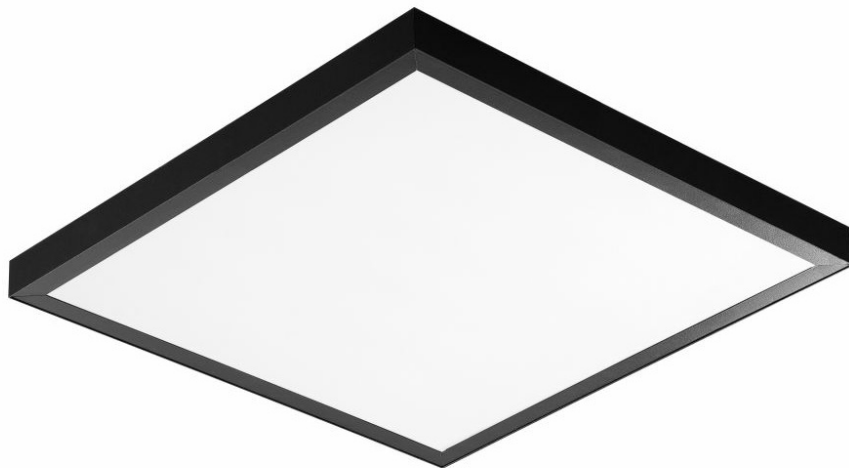

TECHNICAL PARAMETERS

Index:	668203
Ingress protection:	IP44/IP20
Nominal power [W]:	37
Luminous flux [lm]*:	3700
Colour rendering index:	>80
SDCM:	≤ 5
Energy efficiency class:	F
Material of the body:	ABS
Diffuser material:	PS
Diffuser type:	OPAL

CHARACTERISTICS

SQ 600 LED is a new line of square luminaires. The construction, designed from scratch, introduces new solutions ensuring excellent lighting parameters. The body is made of plastic, therefore it is characterized by low weight. The diffuser provides excellent light transmission. The integrated LED module guarantees low power consumption and all the advantages of modern LED light sources.

The luminaire is available in 2 versions:

- with OPAL diffuser - providing soft light;
- with PRM diffuser - with higher luminous efficiency and low glare UGR <19 (18W, 24W, 32W versions).

Available options:

- RCR sensor - sensor used for motion detection, without twilight detection option; uses microwaves for detection (active sensor),
- control in the DALI standard,
- CORRIDOR corridor function (RCR + DALI).

The ingress protection- depends on the method of installation:

- surface mounted - IP20,
- flush-mounted - IP44/20.


APPLICATION

Surface-mounted luminaire with the possibility of flush mounting in modular ceilings and in plasterboard ceilings (using plasterboard recessing kit) is especially recommended for offices, spacious corridors and public spaces.

DETAILED CARD

Nominal power [W]:	37
Index:	668203
Colour temperature [K]:	4000
Light source:	LED module
Luminous flux [lm]:	3700
Diffuser type:	OPAL
Rated power of the luminaire [W]:	42.40
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Colour of the body:	black mat
Luminous efficacy [lm/W]:	87
Energy efficiency class:	F
Electrical protection class:	I
Colour rendering index:	>80
SDCM:	≤ 5
Power factor:	0.98
Diffuser material:	PS
Diffuser colour:	white
Optics material:	PMMA

Optics:	lens
Material of the body:	ABS
Dimensions (H/W/T/S) [mm]:	592/592/44
Mounting dimensions [mm]:	563/297
Ingress protection:	IP44/IP20
Glow wire test [°C]:	650
Mounting version:	surface mounted; recessed mounted in modular ceiling possible
Net weight [kg]:	1.500
Category type:	louvres
Category of application:	commercial facilities, educational institutions
AC voltage range [V]:	90-175
DC voltage range [V]:	198 - 264
LED lifespan L70B50 [h]:	50000
LED lifespan L80B20 [h]:	32000
LED lifespan L90B10 [h]:	15000
Light distribution type:	open space
Photobiological safety:	RG0 - exempt (no photobiological hazard)
Technical Warranty:	5
PZH certificate:	B-BK-60212-0618/20
CE certificate:	110/2023
Manual:	Download PDF
ENEC Certificate:	PL BBJ/006/2021/M1
Plik LDT:	Download

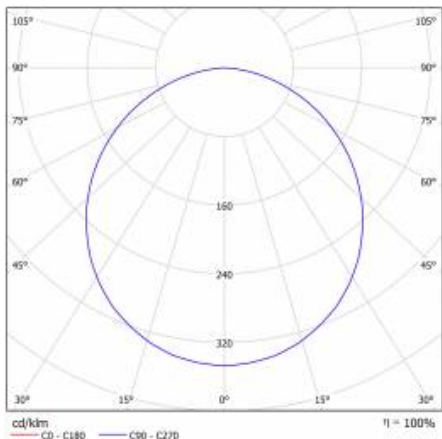


SQ 600 LED 3700LM PLX I KL. IP20 592X592MM 840 (37W) RAL9005


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
999543	Plasterboard recessing kit 630x630 white (steel version)
978395	Installation kit SQ 600 Ceiling system H40 100x100
374845	Frame adapter KG 635x635 WHITE
998966	Frame steel white structure RAL9016 600x600 SM "well effect"



Plasterboard recessing kit 630x630 white (steel version) (999543)



Frame steel white structure RAL9016 600x600 SM "well effect" (998966)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 110/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl