


# LIGHTSTREAM maxi

722289.1131.1.Z2 | Spotlights



Spotlights  
4051859959656  
L 743, B 291, H 83

Pole mounting  
anthracite metallic (DB703)

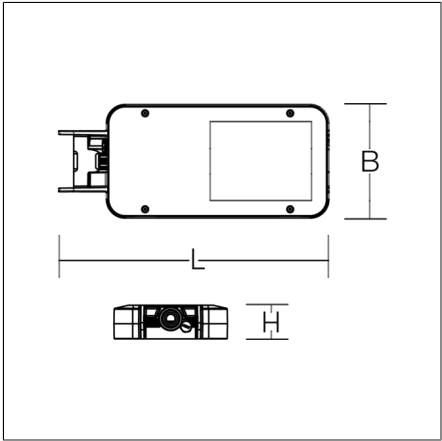

Clever combination of spotlight and pole luminaire in one. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Asymmetrical linear light distribution for narrow streets and paths according to DIN EN 13201 Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 12 m. 1 x Zhaga socket (Book 18) on bottom, 1 x Zhaga socket (Book 18) on top. The integrated Zhaga base allows sensors and light management systems to be retrofitted without the need for tools. Modular design: Mounting set must be ordered separately.

### Product specifications

Length L	743 mm
Width B	291 mm
Height H	83 mm
Weight	9.5 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	36700 lm
System power	248 W
System efficiency	148 lm/W
Glare evaluation UGR (4H 8H)	37,8
Beam angle	69°/43°/69°/2°
Rated life	100000 h (L90/B50)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI Zhaga
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	4
Luminaires on B16A fuse	7
Luminaires on C10A fuse	4
Luminaires on C16A fuse	7
Inrush current / Inrush current duration	23 A / 100 µs
CIE Flux Code / CEN Flux Code	44 80 99 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK08
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE

## Accessories



61199.009  
Fuse box



982977.003



982588.000  
Pole bracket for 2 luminaires, uncoated



982589.000  
Pole bracket for 3 luminaires, uncoated



982590.000  
Pole bracket for 4 luminaires, uncoated



982591.000  
Wall bracket, uncoated



982562.000  
Reducing adapter Ø 60 mm



982638.003  
Junction box H with strain relief.



982974.003



982588.0031  
Pole bracket for 2 luminaires, powder-coated



982589.0031  
Pole bracket for 3 luminaires, powder-coated



982590.0031  
Pole bracket for 4 luminaires, powder-coated



982591.0031  
Wall bracket, powder-coated



982983.000  
Reducing adapter Ø 42 mm

## Modules



982978.0031  
Pole attachment for 76 mm spigot.



983117.0031  
Mounting bracket