


BASIC BALL

312112.002.76 | Pendant luminaires



Pendant luminaires
4051859164593
D 400, H 400

pendant
white

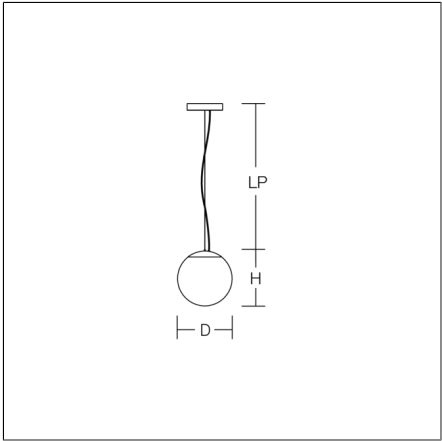

Pendant luminaire in timelessly classic sphere design. Canopy: metal, powder-coated, white. Metal cap: white, powder-coated. Diffuser: shockproof plastic (polyethylene), opal, satin finish. Shadow-free, homogeneous and soft illumination. Single-point steel cable suspension, steplessly adjustable. Special lengths available on request. Power supply cable: white.

Product specifications


Diameter D	400 mm
Height H	400 mm
Suspension length LP	300-4000 mm
Weight	5.9 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	9200 lm
System power	79 W
System efficiency	116 lm/W
Glare evaluation UGR (4H 8H)	21,7
Beam angle	down 180° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	4
Luminaires on B16A fuse	7
Luminaires on C10A fuse	7
Luminaires on C16A fuse	12
Inrush current / Inrush current duration	40 A / 400 µs
CIE Flux Code / CEN Flux Code	25 50 76 57 100
Type of protection	IP 40
Protection class	I
Filament test	750 °C
Impact resistance	IK10
Ambient temperature	-25 °C ... + 35 °C
Conformity mark	CE, EAC, UKCA

BASIC BALL

312112.002.76 | Pendant luminaires



Spareparts



08-311053.012
Replacement diffuser