

PRODUCT DATASHEET

LN INV DI 1500 P 69W 930 PS WT

LINEAR INDIVILED DIRECT/INDIRECT 1500 PS | Pendant luminaire for single or light line office application with CRI90 and power select (PS) feature, 1500 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct and indirect lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- Pendant luminaires with direct light emission (70%) and indirect light emission (30%)
- High performance with CRI90 and up to 134 lm/W
- Highly versatile due to selectable power steps (Power Select - PS) on the driver
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)



- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	69 W / 63 W / 61 W / 53 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	315...285...270...242 mA
Inrush current	16 A
Inrush current time T_{h50}	176 μ s
Max. number of luminaires per miniature circuit breaker B16	17
Max. number of luminaires per miniature circuit breaker C10	14
Max. number of luminaires per miniature circuit breaker C16	23
Power factor λ	≥ 0.90
Total harmonic distortion	≤ 20 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	8350 lm / 7800 lm / 7600 lm / 6650 lm
Luminous efficacy	116 lm/W / 118 lm/W / 121 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 90
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	≤ 0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 ° + 130 °
UGR	< 19

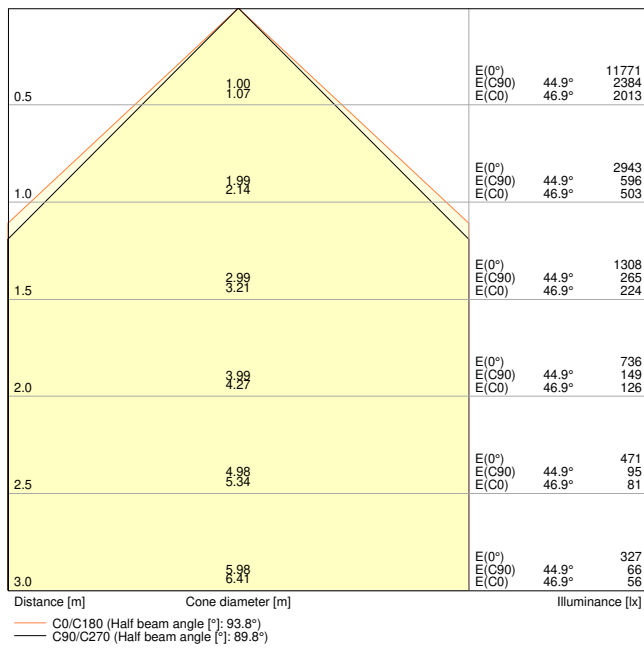


LN INV DI 1500 P 69W 930 PS WT 1400mA

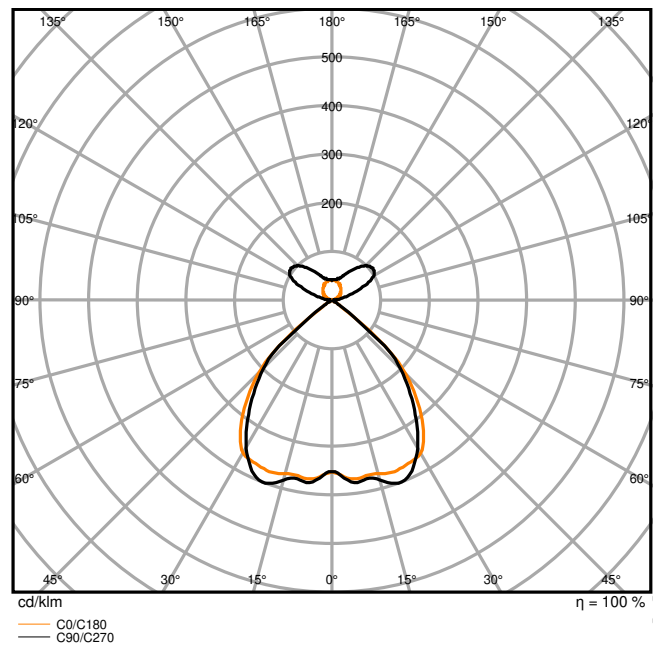

LN INV DI 1500 P 69W 930 PS WT 1400mA

Dimensions & Weight

Length	1475.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	4300.00 g

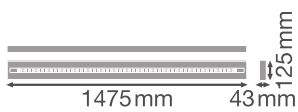

LN INV 1500 P

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1050 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type OT FIT 55/220–240/1A0 CS L AP& IT FIT 18/220... 240/350 CS L

Certificates & Standards


Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
-----------	---

Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00026-V01.01-EN
Replaceable light source (EPREL)	By the end consumer






Additional product data



Number of illuminants	2
Added function	EVERLOOP / MULTI SELECT

Accessories Mandatory

Product image	Product name	EAN
	LN INV SUSPENSION KIT WT	4099854215537

Accessories Optional










Product image	Product name	EAN
	LN INV CORNER CONNECTOR WT	4099854214905
	LN INV SUSPENSION WIRE	4099854215551
	LN INV 1500 THROUGHWIRING KIT	4099854214806
	LN INV INFILL 1500 WT	4099854214844
	LN INV INFILL 600 WT	4099854214882






Product image	Product name	EAN
	LN INV INFILL 1200 WT	4099854214868
	LN INV INLINE CONNECTOR	4099854215612



EQUIPMENT / ACCESSORIES


- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN INV
	Legal information	LN INV PS
	Legal information	LSI LN INDIVILED
	Legal information	Legal Insert LN INV P PS
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LN INV DI 1500 P 69W 930 PS WT 1400mA
	LDT file (Eulumdat)	LN INV DI 1500 P 69W 930 PS WT 1400mA

Photometric and lighting design files		Document name
	ULD file (DIALux)	LN INV DI 1500 P 69W 930 PS WT
	ROLF file (RELUX)	LN INV DI 1500 P 69W 930 PS WT
	UGR file (UGR table)	LN INV DI 1500 P 69W 930 PS WT 1400mA
	Light distribution curve type cone	LN INV DI 1500 P 69W 930 PS WT 1400mA
	Light distribution curve type polar	LN INV DI 1500 P 69W 930 PS WT 1400mA

CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D I 1500 G2.


Tender texts	Document name
 Tender documents	LINEAR INDIVILED DIRECTINDIRECT 1500 PS 1500 P 69W 930 PS WT-EN

LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854135231	Folding box 1	1,252 mm x 167 mm x 87 mm	5000.00 g	18.19 dm ³
4099854135248	Shipping box 2	1,547 mm x 187 mm x 189 mm	11600.00 g	54.68 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

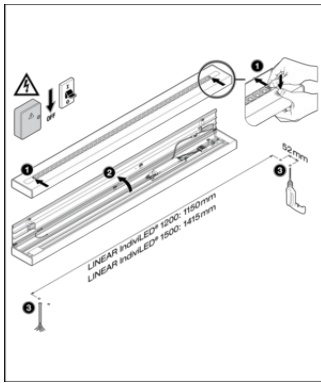

LINEAR KNOWLEDGE 1500 PS WT	DIMENSIONS	PS 1500				PS 1415				Total	
		Length	Width	Height	Weight	Length	Width	Height	Weight	Length	Weight
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	

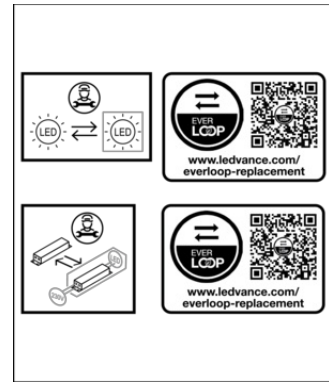

dip switch Preset: ON/ON

DRIVER

LINEAR KNOWLEDGE 1500 PS WT	DIMENSIONS	PS 1500				PS 1415				Total	
		Length	Width	Height	Weight	Length	Width	Height	Weight	Length	Weight
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	
LINEAR KNOWLEDGE 1500 PS WT	1500	1500	15	10	1415	15	10	1415	1500	1415	

References / Links

- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.