



# CorePro - LED HID SON-T



## TForce Core LED road 26W 740 E27 MV

The Philips CorePro LED HID SON-T lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. This new generation of products brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant saving with a low initial investment. Furthermore, they're designed to have the same lamp size and light distribution as other HID lamps, so you will never know the difference. All thanks to our HighPower LED filament technology. Plus, its unique IP65 design means it can be used for outdoor applications

### Warnings and Safety

• Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

### Product data

General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	15,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	740 [CCT of 4000K]
Luminous Flux	4,500 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	173.00 lm/W
Color Consistency	<6

Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	26 W
Lamp Current (Nom)	120 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	Mains

## CorePro - LED HID SON-T

Inrush current at mains	10.1
Max. lamp no. on MCB B type 10A - Mains	9
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	14
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with Compensation Capacitor.	-

### Temperature

T-Case Maximum (Nom)	44.55 °C
----------------------	----------

### Controls and Dimming

Dimmable	No
----------	----

### Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	T-shape
Net Weight (Piece)	0.100 kg

### Approval and Application


Energy Efficiency Class	C
-------------------------	---

Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	1641607
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	4
Ambient temperature range	-30 to +45 °C

### Product Data

Order product name	TForce Core LED road 26W 740 E27 MV	
Full product name	TForce Core LED road 26W 740 E27 MV	
Full product code	871951431631700	
Order code	929002485102	
Material Nr. (12NC)	929002485102	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8719514316317	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8719514316324	



## Dimensional drawing



Product	D	C
TForce Core LED road 26W 740 E27 MV	38.5 mm	213 mm


# CorePro - LED HID SON-T

## Photometric data

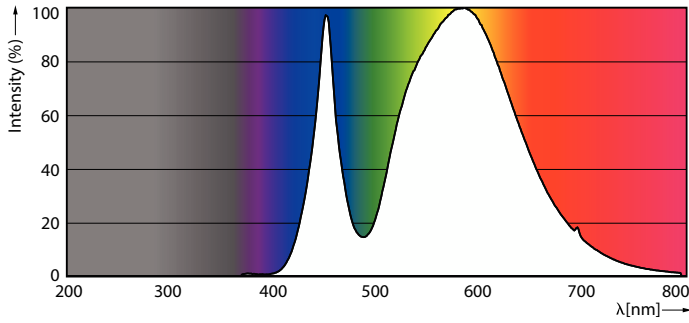

Spectral Power Distribution Colour - TForce Core LED road 26W 740 E27 MV

Light Distribution Diagram - TForce Core LED road 26W 740 E27 MV




General uniform lighting - TForce Core LED road 26W 740 E27 MV

## Lifetime



Life Expectancy Diagram

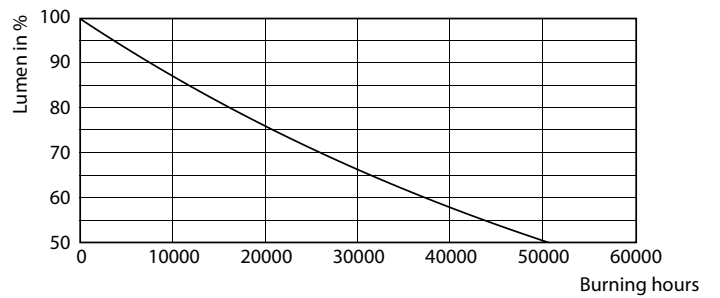

Lumen Maintenance Diagram - TForce Core LED road 26W 740 E27 MV

