


LIGHTSTREAM maxi

722291.114.Z2 | Spotlights



Spotlights
4051859959724
L 743, B 291, H 56

Pole mounting
silver, matt (approx. RAL 9006)

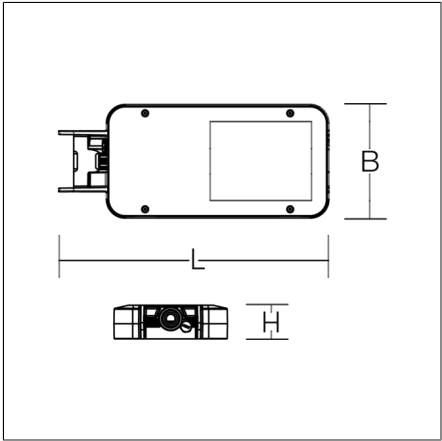

Clever combination of spotlight and pole luminaire in one. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Asymmetrical narrow beam light distribution for area lighting (e.g. parking lots, loading zones) Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 12 m. 1 x Zhaga socket (Book 18) on bottom, 1 x Zhaga socket (Book 18) on top. The integrated Zhaga base allows sensors and light management systems to be retrofitted without the need for tools. Modular design: Mounting set must be ordered separately.

Product specifications

Length L	743 mm
Width B	291 mm
Height H	56 mm
Weight	9.5 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	32700 lm
System power	248 W
System efficiency	132 lm/W
Glare evaluation UGR (4H 8H)	40,1
Beam angle	68°/69°/68°/0°
Rated life	100000 h (L90/B50)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI Zhaga
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	4
Luminaires on B16A fuse	7
Luminaires on C10A fuse	4
Luminaires on C16A fuse	7
Inrush current / Inrush current duration	23 A / 100 µs
CIE Flux Code / CEN Flux Code	29 67 97 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK08
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE

Accessories



61199.009
Fuse box



982977.003



982588.000
Pole bracket for 2 luminaires, uncoated



982589.000
Pole bracket for 3 luminaires, uncoated



982590.000
Pole bracket for 4 luminaires, uncoated



982591.000
Wall bracket, uncoated



982562.000
Reducing adapter Ø 60 mm



982638.003
Junction box H with strain relief.



982974.003



982588.004
Pole bracket for 2 luminaires, powder-coated



982589.004
Pole bracket for 3 luminaires, powder-coated



982590.004
Pole bracket for 4 luminaires, powder-coated



982591.004
Wall bracket, powder-coated



982983.000
Reducing adapter Ø 42 mm

Modules



982978.004
Pole attachment for 76 mm spigot.



983117.004
Mounting bracket