


# LIGHTSTREAM mini

722284.0031.76 | Spotlights



Spotlights  
4051859956334  
L 395, B 166, H 49

Pole mounting, Universal mounting system  
anthracite metallic (DB703)

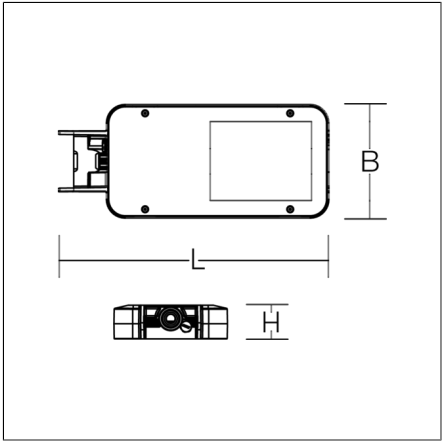

Clever combination of spotlight and pole luminaire in one. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Tilt angle can be adjusted and locked in 5 degree steps featuring angular scale. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass, edge printed. Cover screwed to housing. Lens system made of plastic (PMMA). Replaceable LED spot modules according to ZHAGA standards. Symmetrical light distribution. Constant light output (CLO). With NFC programming interface. Pre-assembled connection cable, length 0.5 m. Modular design: Mounting set must be ordered separately.

## Product specifications

Length L	395 mm
Width B	166 mm
Height H	49 mm
Weight	2.4 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	4600 lm
System power	31 W
System efficiency	148 lm/W
Glare evaluation UGR (4H 8H)	23,7
Beam angle	55°/55°
Rated life	100000 h (L90/B50)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	26
Luminaires on C10A fuse	27
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	18 A / 280 µs
CIE Flux Code / CEN Flux Code	83 96 99 100 100
Type of protection	IP 66
Protection class	I
Filament test	960 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE

## Accessories



61199.009  
Fuse box



982977.003



982058.000  
Wall bracket, 500 mm, uncoated



982086.000  
Wall bracket, 1000 mm, uncoated



982049.000  
Pole attachment (double): for spigot 60 mm, unpainted



982050.000  
Pole attachment (double): for spigot 76 mm, unpainted



982524.0031  
Adapter set for 4-fold configuration (4 x 90°)



982093.000  
Pole clip for pole diameter 115 - 135 mm



982591.0031  
Wall bracket, powder-coated



982588.0031  
Pole bracket for 2 luminaires, powder-coated



982589.0031  
Pole bracket for 3 luminaires, powder-coated



982590.0031  
Pole bracket for 4 luminaires, powder-coated




982983.000  
Reducing adapter Ø 42 mm




982638.003  
Junction box H with strain relief.



982974.003



982058.0031  
Wall bracket, 500 mm, anthracite metallic



982086.0031  
Wall bracket, 1000 mm, anthracite metallic



982049.0031  
Pole attachment (double): for spigot 60 mm, anthracite metallic (DB703)



982050.0031  
Pole attachment (double): for spigot 76 mm, anthracite metallic (DB703)



982092.000  
Pole clip for pole diameter 95 - 114 mm



982591.000  
Wall bracket, uncoated



982588.000  
Pole bracket for 2 luminaires, uncoated



982589.000  
Pole bracket for 3 luminaires, uncoated



982590.000  
Pole bracket for 4 luminaires, uncoated



982562.000  
Reducing adapter Ø 60 mm

# LIGHTSTREAM mini

722284.0031.76 | Spotlights



## Modules



982978.0031  
Pole attachment for 76 mm spigot.



983117.0031  
Mounting bracket



983164.0031  
Mounting bracket