


# TX-MOVE

901731.004.2.76 | Recessed projectors



Recessed projectors  
4051859938248  
L 622, B 116, H 39

Lay-in luminaires  
silver, matt (approx. RAL 9006)

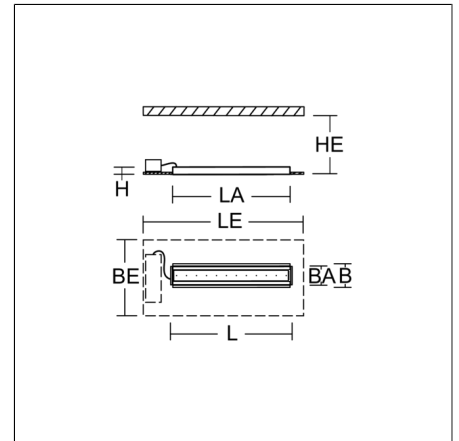

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. Swivel range: 90°. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light emission. Suitable for laying in grid ceiling module 625. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

## Product specifications


Length L	622 mm
Width B	116 mm
Height H	39 mm
Cut-out length LA	602 mm
Cut-out width BA	98 mm
Installation space length LE	700 mm
Installation space width BE	316 mm
Installation space height HE	100 mm
Weight	2.15 kg
Light source	LED
Colour temperature	2700 K
Rated luminous flux	1700 lm   2350 lm   3050lm
System power	16 W   23 W   31W
System efficiency	98 lm/W   102 lm/W   106lm/W
Glare evaluation UGR (4H 8H)	26,7   27,9   28,8
Beam angle	112°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 20 on room side IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

# TX-MOVE

901731.004.2.76 | Recessed projectors



## Accessories



982868.004

Mounting frame for installation in suspended ceilings.