


CADERO quadra

581637.004.1.19 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859225003
L 257, B 257, H 81

Ceiling mounting, Wall (surface)
silver, matt (approx. RAL 9006)

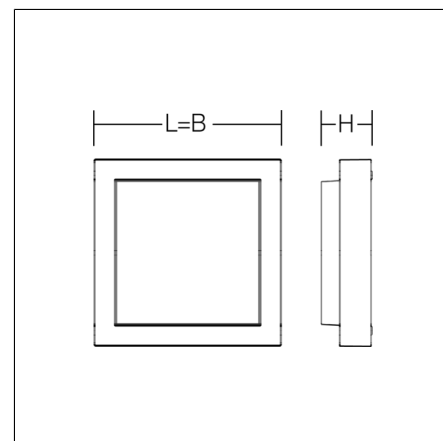

Decorative surface-mounted luminaire for outdoor use. Base and housing made of corrosion resistant pressure die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Clear crystal glass, painted inside, with fixing device. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Simple mounting spring system for installation without tools. With integrated movement sensor. Mains connection 2 x 3 x 1.5 mm². Second cable inlet for loop through.

Product specifications

Length L	257 mm
Width B	257 mm
Height H	81 mm
Weight	2.9 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	750 lm
System power	12 W
System efficiency	63 lm/W
Glare evaluation UGR (4H 8H)	22,9
Beam angle	down 128° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	129
Luminaires on B16A fuse	207
Luminaires on C10A fuse	129
Luminaires on C16A fuse	207
Inrush current / Inrush current duration	0.1 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 71 91 95 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK05
Ambient temperature	-20 °C ... + 41 °C
Conformity mark	CE, EAC

CADERO quadra

581637.004.1.19 | Ceiling and wall luminaires



Spareparts



981210.002
Replacement glass