


ANDHO mini

722268.004.2.76 | Spotlights



Spotlights
4051859915218
L 227, B 114, H 182

Ceiling mounting, pedestal mount, Wall (surface)
silver, matt (approx. RAL 9006)

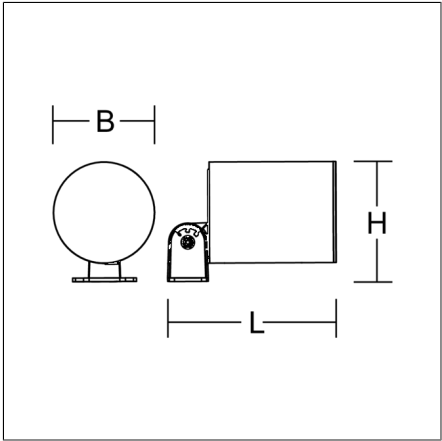

Surface-mounted LED projector in a timeless design. Housing: die-cast aluminium, seawater resistant powder-coated. Integral membrane valve for pressure compensation and avoidance of condensation. MIRO-SILVER® reflectors for outstanding efficiency or polycarbonate lenses for the best uniformity of the light cone. Cover clear single-pane toughened glass, edge printed. COB LED with socket for easy replacement. Projector: horizontal rotation range: 40°, vertical swivel range: 90°. Lockable projector orientation. Driver integrated.

Product specifications


Length L	227 mm
Width B	114 mm
Height H	182 mm
Projection AL	227 mm
Weight	1.7 kg
Light source	LED
Colour temperature	2700 K
Rated luminous flux	2800 lm
System power	27 W
System efficiency	104 lm/W
Glare evaluation UGR (4H 8H)	18,7
Beam angle	40°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	96 100 100 100 100
Type of protection	IP 65
Protection class	II
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE

ANDHO mini

722268.004.2.76 | Spotlights



Accessories



982159.000
Reeded glass



982168.003
Barn door shutter



982974.003



982165.003
Snap-on hood



982162.003
Louvres