


FLAT SLIM round

312646.004.76 | Pendant luminaires



Pendant luminaires
4051859802501
D 480, H 70

pendant
silver, matt (approx. RAL 9006)

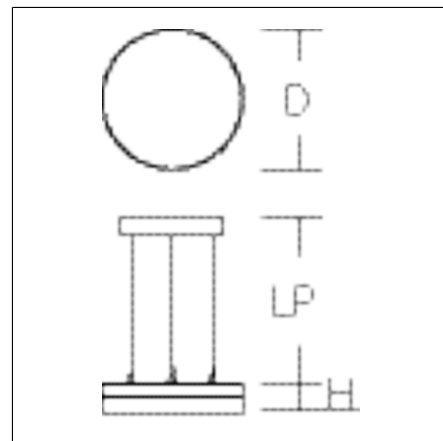

Decorative round LED pendant luminaire. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: bayonet system. Uniform lighting achieved by the use of LED panel boards. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. Dimmable DALI.

Product specifications


Diameter D	480 mm
Height H	70 mm
Suspension length LP	500-1500 mm
Weight	6.6 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 3450 lm 5000 lm 4000 K: 3600 lm 5150 lm
System power	3000 K: 26 W 39 W 4000 K: 26 W 39 W
System efficiency	3000 K: 133 lm/W 128 lm/W 4000 K: 138 lm/W 132 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 21,9 23,2 4000 K: 22 23,3
Beam angle	down 129° up 180°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Inrush current / Inrush current duration	10 A / 200 µs
CIE Flux Code / CEN Flux Code	40 71 90 84 100
Protection class	I
Filament test	650 °C
Impact resistance	IK02
Ambient temperature	-25 °C ... + 40 °C
Conformity mark	CE, EAC

FLAT SLIM round

312646.004.76 | Pendant luminaires



Spareparts



982973.002
Replacement LED module



982897.002
Replacement diffuser