


# CENTRYXX W IP65plus

672549.002 | Stand-by luminaires for escape route illumination



Wall luminaires  
4051859869122  
L 117, B 190, H 190

Wall (surface)  
white

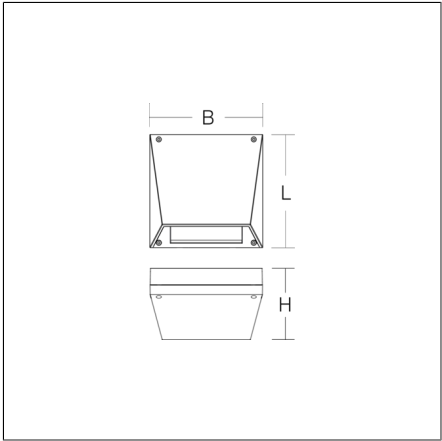

Wall luminaire for escape route illumination. Housing: die-cast aluminium, powder-coated. With plastic lenses for escape route illumination. Driver integrated. Suitable for connection to central battery systems.

### Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Length L	117 mm
Width B	190 mm
Height H	190 mm
Weight	1.8 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	350 lm
System power, mains operation	4,9 W
Rated luminous flux, emergency operation	350 lm
System power, emergency operation	4,3 W
System efficiency	71 lm/W
Glare evaluation UGR (4H 8H)	43,5
Beam angle	down 87°/78°/18°/78° up 90°/90°/0°/90°
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
CIE Flux Code / CEN Flux Code	27 55 84 93 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Conformity mark	CE