



TX-MOVE

901726.003.3.76 | Recessed projectors

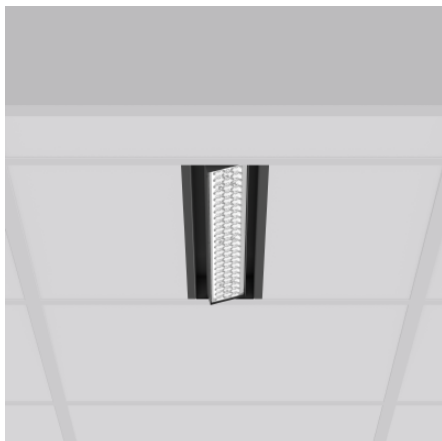

Recessed projectors
4051859973409
L 597, B 116, H 39

Lay-in luminaires
deep black, matt (RAL 9005)

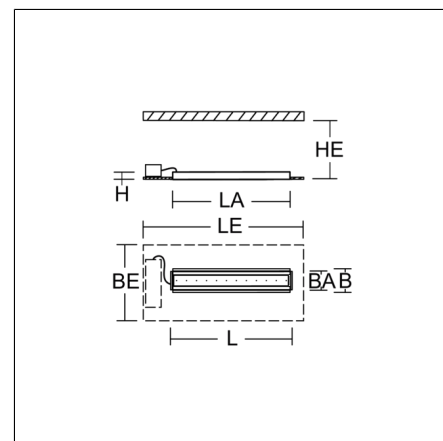

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. Swivel range: 90°. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Spezielle Mikrostrukturen reduzieren Gelbsaum. Asymmetrical light distribution. Suitable for laying in grid ceiling module 600. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

Product specifications

Length L	597 mm
Width B	116 mm
Height H	39 mm
Cut-out length LA	577 mm
Cut-out width BA	98 mm
Installation space length LE	675 mm
Installation space width BE	316 mm
Installation space height HE	100 mm
Weight	2.15 kg
Light source	LED
Colour temperature	3500 K
Rated luminous flux	2750 lm 3800 lm 5350lm
System power	18 W 26 W 39W
System efficiency	137 lm/W 146 lm/W 153lm/W
Glare evaluation UGR (4H 8H)	26,6 27,8 28,9
Beam angle	35°/50°/0°/50°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	65 90 98 100 100
Type of protection	IP 20 on room side IP 20
Protection class	I
Filament test	850 °C
Impact resistance	IK04
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

901726.003.3.76 | Recessed projectors



Accessories



982866.003

Mounting frame for installation in suspended ceilings.