


FLAT SLIM step

672675.002 |



Ceiling and wall luminaires
4051859982296
D 450, H 75

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

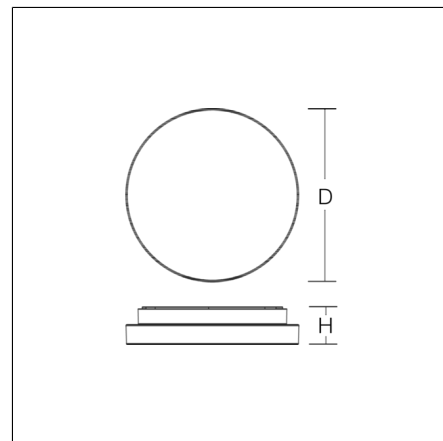

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Driver integrated. Suitable for connection to central battery systems.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Diameter D	450 mm
Height H	75 mm
Weight	4.42 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 4000 lm
	4000 K: 4150 lm
System power, mains operation	3000 K: 38 W
	4000 K: 38 W
Rated luminous flux, emergency operation	3000 K: 800 lm
	4000 K: 820 lm
System power, emergency operation	3000 K: 8,5 W
	4000 K: 8,5 W
System efficiency	3000 K: 105 lm/W
	4000 K: 109 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 22,2
	4000 K: 22,3
Beam angle	down 126°
Rated life	up 180°
Colour rendering index (CRI)	50000 h
Photobiological safety according to EN 62471	80
Driver	Risk group 1
Control	Converter
Voltage	on/off
Luminaires on B10A fuse	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B16A fuse	12
Luminaires on C10A fuse	20
Luminaires on C16A fuse	21
Inrush current / Inrush current duration	34
CIE Flux Code / CEN Flux Code	21 A / 230 µs
Type of protection	41 71 90 79 100
Protection class	IP 65
Filament test	I
Impact resistance	960 °C
Ambient temperature for maintained power	IK03
Safety marks	-20 °C ... + 40 °C
Conformity mark	D-mark
	CE, EAC