


Classia  
Acoustic signal devices

RW4351V230 - RA4351V230 - RG4351V230  
RW4356V230 - RA4356V230 - RG4356V230



**Use**

Acoustic signal devices: buzzer, bronze bell


**Range**

Designation	Item
Bronze bell	<input type="checkbox"/> RW4351V230
	<input type="checkbox"/> RA4351V230
	<input type="checkbox"/> RG4351V230
Buzzer	<input type="checkbox"/> RW4356V230
	<input type="checkbox"/> RA4356V230
	<input type="checkbox"/> RG4356V230

Color code:

White colour     Aluminum colour     Black colour

**Overall dimensions (mm)**

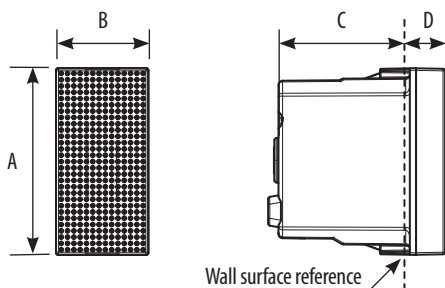

	A	B	C	D
..4351V230	45.1	22.3	33	9.8
..4356V230				

**Connection**

Terminal Type: screw clamp  
Terminal Capacity: 2 x 2.5 mm<sup>2</sup> max  
Stripping Length: 9 mm  
Compatible with flexible or rigid cables

**Technical characteristics**

**- Protection index**  
(considering a complete installation, including cover plate)  
Penetration by solid bodies/liquid: IP40

**- Mechanical characteristics**  
Impact test: IK 04

**- Material characteristics**

Material:  
Case and Key cover: PC (Polycarbonate)  
Halogen-free  
UV resistant  
Self-extinguishing:  
850°C/30 s for insulating parts holding live parts in place  
650°C/30 s for other parts made of insulating materials

**- Electrical characteristics**

Voltage: 250 V a.c.  
Current: 12 VA  
Acoustic intensity level: 80dB

**- Climatic characteristics**

Storage temperature: -10° C to +70° C  
Use temperature: -5° C to +35° C

**Cleaning**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Compliance with standards: IEC/EN 62080  
Refer to e.catalogue.