KombiSIGN 70 / Permanent Beacon 840 Perm. light element 12-230VAC/DC BU



ļ

| Part No.: 840.500.00 Series: KombiSIGN 70 | |
|--|--------------------------|
| MECHANICAL DATA | |
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Blue |
| Protection category | IP54 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 82 g |
| Product weight | 67 g |
| - | 87 g |
| ELECTRICAL DATA | |
| Operating voltage | 12-230V |
| Operating voltage type | AC/DC |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | 11 |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |
| Power illuminant | max.5W |
| OPTICAL DATA | |
| Light source | Filament lamp |
| Light colour | Blue |
| Service life optical | depends on bulb |
| Lamp fitting/socket | B15d |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

KombiSIGN 70 / Permanent Beacon 840 Perm. light element 12-230VAC/DC BU

| ICAO Certification | No |
|-----------------------|----|
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

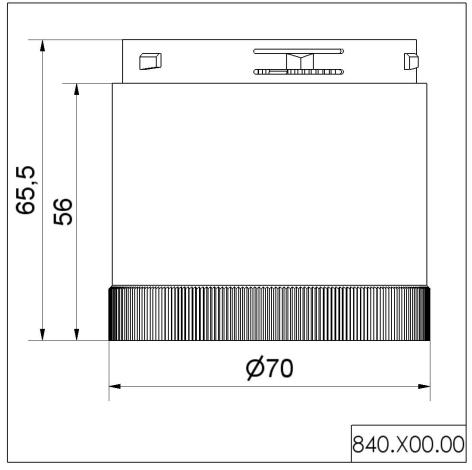

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.