


product description: Trunkings are supplied with cover.  
 Optimal closing, fixed cover. Easy installation and removal.  
 Rib can be easily broken out at the bottom of the trunking.


material: PVC - Pb-free, hard to inflame  
 self-snuffing: yes, within 30 s  
 temperature resistance - static: -20 - +60 °C  
 temperature resistance - dynamic: -5 - +60 °C  
 working temperature: >0 °C  
 dielectric strength: >30 kV/mm  
 fire class for underlying material: A1-F  
 colour: RAL 7030 gray  
 meets the requirements: EN 50085-1 ed.2:06, EN 50085-2-1:07  
 storage: ČSN 64 0090



Perforation in two rows above the width of 80 mm.

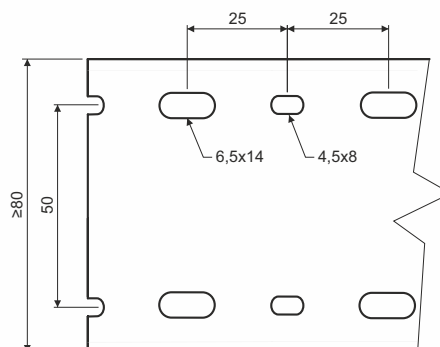

Perforation in one row up to the width of 60 mm.

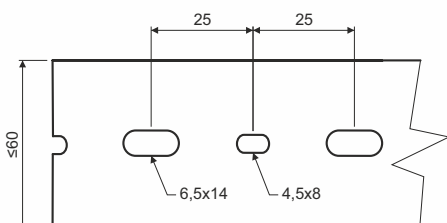

type number	outer width x height (mm)	inner width x height (mm)	length (m)	package (m)	number of conductors when 50% of the trunking capacity is filled		
					0,75 mm <sup>2</sup> Ø2,8 mm	1 mm <sup>2</sup> Ø2,9 mm	1,5 mm <sup>2</sup> Ø3,2 mm
<b>RK 30X30_LD</b>	30 x 30	27 x 27	2	64	53	50	41
<b>RK 30X40_LD</b>	30 x 40	37 x 37	2	60	105	98	80
<b>RK 40X60_LD</b>	40 x 60	36 x 56	2	32	162	151	124
<b>RK 60X60_LD</b>	60 x 60	56 x 56	2	32	333	310	255
<b>RK 80X60_LD</b>	80 x 60	76 x 56	2	24	245	229	188
<b>RK 100X60_LD</b>	100 x 60	96 x 56	2	16	417	389	319
<b>RK 40X80_LD</b>	40 x 80	36 x 76	2	28	231	216	177
<b>RK 60X80_LD</b>	60 x 80	56 x 76	2	20	350	326	268