


RING OF FIRE

311570.004.2.730 | Pendant luminaires



Pendant luminaires
4051859258452
D 690, H 81

pendant
anodised aluminium

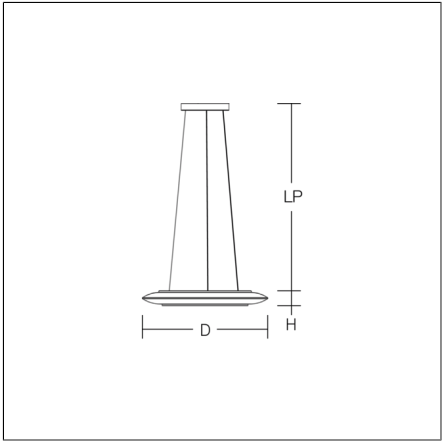

A uniquely shaped pendant luminaire with elliptical glass. Supporting ring made of anodised aluminium. Canopy aluminium anodised. Opal glass: mouth-blown, satin finish. Tunable white dynamically adjustable from 2700 K to 6500 K. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. Power supply through separate cable. Converter integrated in the canopy. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

Product specifications

Diameter D	690 mm
Height H	81 mm
Suspension length LP	500-1200 mm
Weight	7.45 kg
Light source	LED
Colour temperature	2700 - 6500 K
Rated luminous flux	3250...3500 lm
System power	38...38 W
System efficiency	86...92 lm/W
Beam angle	down 115° up 113°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	230 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	6
Luminaires on B16A fuse	10
Inrush current / Inrush current duration	60 A / 200 µs
CIE Flux Code / CEN Flux Code	43 73 90 55 100
Type of protection	IP 20
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



05-1936.002
Replacement glass