


Classia
Removable LED lamp

R4380

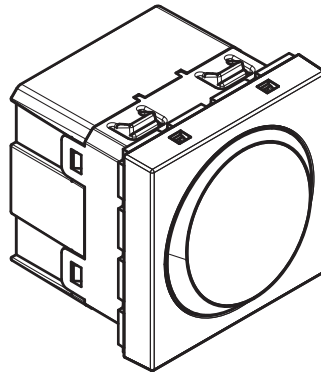


Use

Removable Led lamp 2 modules.
This lamp lights up automatically in case of power failure or when extracted from its base. It can also be used as a torch (ON-OFF).
Battery life: 2h

Range

Designation	Item
Removable led lamp. Lamp extraction by simply pressing.	<input type="checkbox"/> R4380

Overall dimensions (mm)

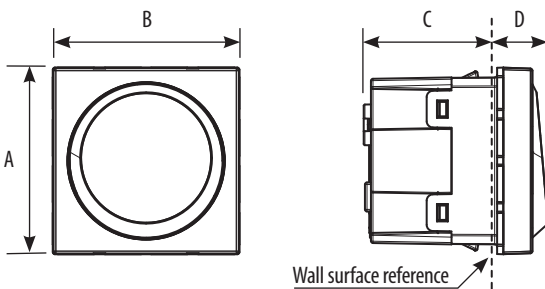

	A	B	C	D
R4380	45.1	45	31	13.6


Connection

Terminal Type: screw clamp
Terminal Capacity: 2 x 1.5 mm² or 1 x 2.5 mm²
Stripping Length: 8 mm
Screwdriver: flat 3.5
Compatible with flexible or rigid cables

Technical characteristics

- **Protection index**
(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**
Impact test: IK 04
- **Material characteristics**
Base: ABS
Diffuser: PC (opalescent)
Cover: ABS
Halogen-free
UV resistant
Self-extinguishing:
850°C/30 s for insulating parts holding live parts in place
650°C/30 s for other parts made of insulating materials

- Photoelectric characteristics
Normal

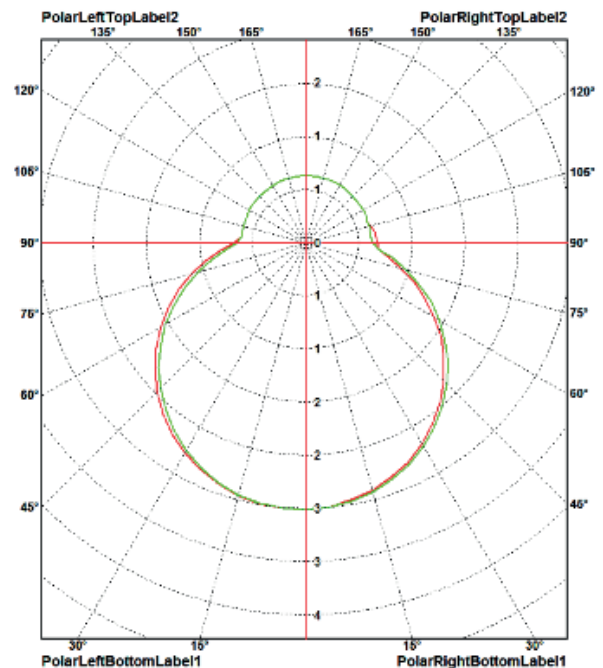


C180 — C270 — C0 — C90

Technical characteristics (continued)

- Photoelectric characteristics

Boost

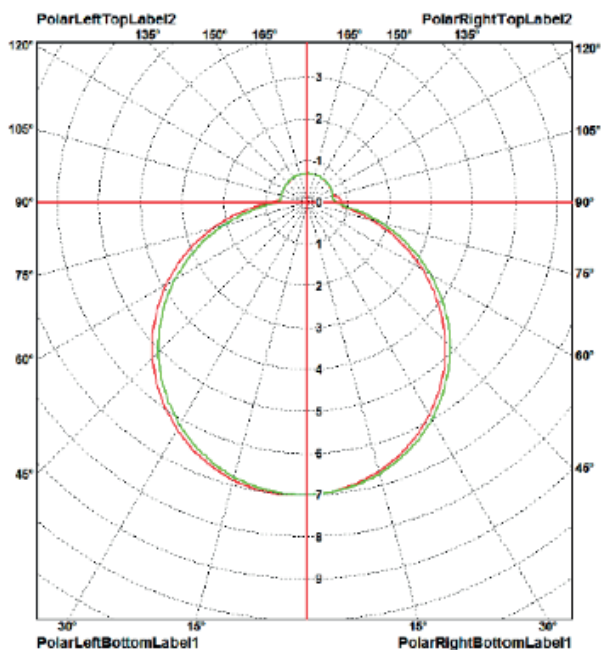

C180 — C270 — C0 — C90 —

- Electrical characteristics

Voltage: 230 V

Frequency: 50/60 Hz

Luminous flux:

- Mode ON: 5 lm

- Mode BOOST: 19 lm

Battery NI-MH: - 3.6 V - 80 mA

- charging time: 48 h

Stand-by consumption:

- 230 V: 0.2 W - 8.6 mA

- 110 V: 0.4 W - 13.3 mA

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: -5° C to + 35° C

Standards and approvals

EN 60598-1

EN 60598-2-2

EN 60825-1

EN 61547

EN 61000-3-2

EN 61000-3-3

EN 55015

Related items

BT-4380NB: spare battery

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.