

Axyl Stride

THORN

96701583 AXYL STRIDE L SE 28L 930 A/S RD ANT

LED 13W AXYL_ST_L_AS930	IP65	IK08		
-------------------------	------	------	---	---


Axyl Stride

AXYL Stride, a wall mounted, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 270 x 33 x 115 mm
Luminaire input power: 13.1 W
Luminaire luminous flux: 421 lm
Luminaire efficacy: 32 lm/W
Weight: 1.32 kg



TLG_AXYL_F_STRIDE_LARGE_ANT.jpg

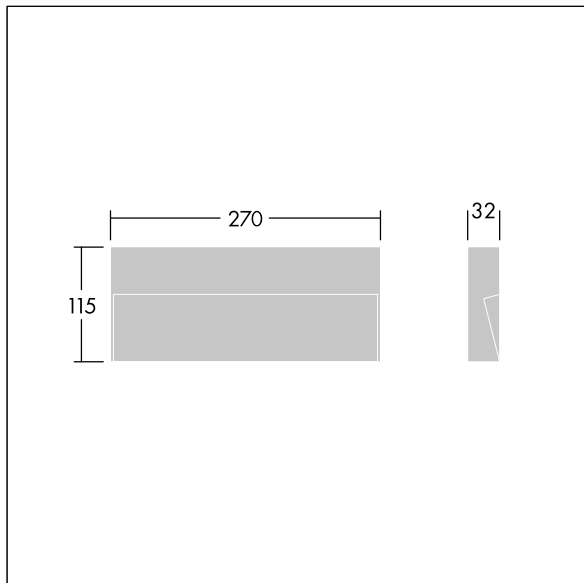

TLG_AXYL_M_STRIDE_L.wmf

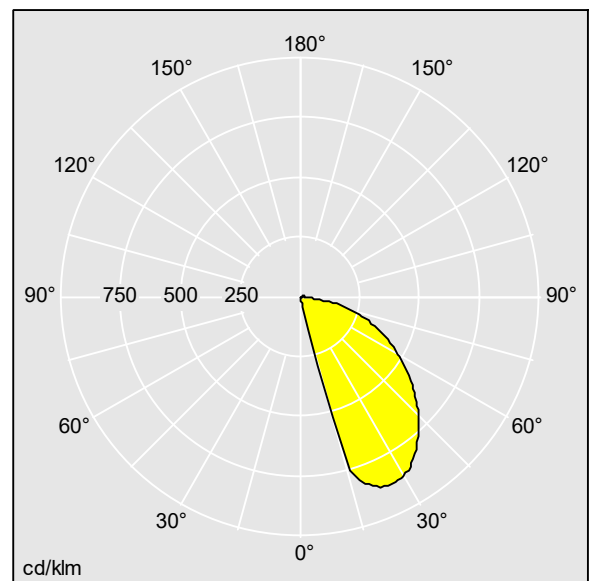

96701583.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 421 lm
Luminaire efficacy*: 32 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 13.1 W Power factor = 0.8
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,02 DLOR: 0,98

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting