


# FLAT SLIM step

312637.002.76 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859773764  
D 530, H 75

Ceiling mounting, Wall (surface)  
traffic white, matt (RAL 9016)

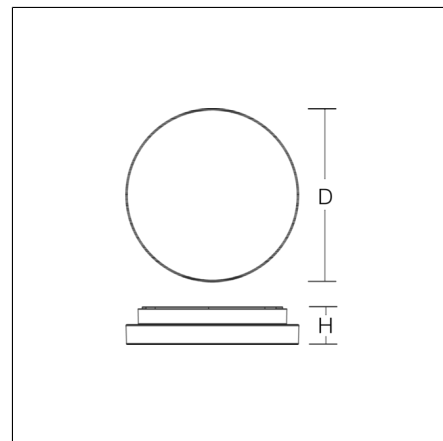

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. Dimmable DALI.

## Product specifications


|                                              |                                                            |
|----------------------------------------------|------------------------------------------------------------|
| Diameter D                                   | 530 mm                                                     |
| Height H                                     | 75 mm                                                      |
| Weight                                       | 5.9 kg                                                     |
| Light source                                 | LED                                                        |
| Colour temperature                           | 3000 K   4000 K                                            |
| Rated luminous flux                          | 3000 K: 3500 lm   4850 lm<br>4000 K: 3600 lm   5000 lm     |
| System power                                 | 3000 K: 28 W   40 W<br>4000 K: 28 W   40 W                 |
| System efficiency                            | 3000 K: 125 lm/W   121 lm/W<br>4000 K: 129 lm/W   125 lm/W |
| Glare evaluation UGR (4H 8H)                 | 3000 K: 21,1   22,2<br>4000 K: 21,2   22,3                 |
| Beam angle                                   | down 124°<br>up 180°                                       |
| Rated life                                   | 50000 h (L90/B50)                                          |
| Colour rendering index (CRI)                 | 80                                                         |
| Colour tolerance                             | 3                                                          |
| Photobiological safety according to EN 62471 | Risk group 1                                               |
| Driver                                       | Converter, dimmable                                        |
| Control                                      | DALI                                                       |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz                                 |
| Inrush current / Inrush current duration     | 10 A / 200 µs                                              |
| CIE Flux Code / CEN Flux Code                | 42 72 91 83 100                                            |
| Type of protection                           | IP 65                                                      |
| Protection class                             | I                                                          |
| Filament test                                | 960 °C                                                     |
| Impact resistance                            | IK02                                                       |
| Ambient temperature                          | -20 °C ... + 45 °C                                         |
| Safety marks                                 | D-mark                                                     |
| Conformity mark                              | CE, EAC                                                    |

# FLAT SLIM step

312637.002.76 | Ceiling and wall luminaires



## Spareparts



982973.002  
Replacement LED module



982901.002  
Replacement glass