




Pendant luminares
4010319922609
L 350, B 56, H 200

pendant
silver, matt (approx. RAL 9006)

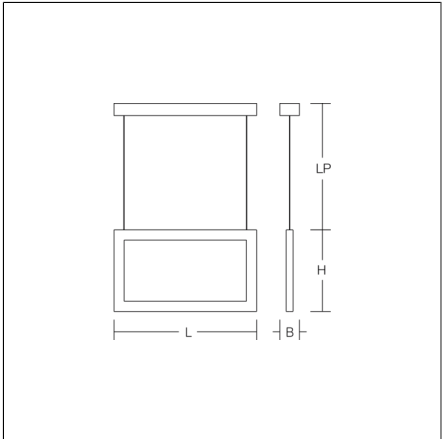

Luminaire for escape route identification. Housing: anodised aluminium, silver. Display panel: patented MicroLens technology and legend on both sides. 2-point steel cable suspension, steplessly adjustable. Driver integrated. Suitable for connection to central battery systems. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	350 mm
Width B	56 mm
Height H	200 mm
Suspension length LP	500 mm
Weight	1.84 kg
Light source	LED
Colour temperature	5700 K
System power, mains operation	6,1 W
System power, emergency operation	6,1 W
Colour rendering index (CRI)	80
Colour tolerance	6
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminares on B10A fuse	17
Luminares on B16A fuse	27
Luminares on C10A fuse	28
Luminares on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE