


ANDHO midi

931196.004.1.76 | Surface mounted downlights



Surface mounted downlights
4051859494904
D 154, H 157

Ceiling mounting
silver, matt (approx. RAL 9006)

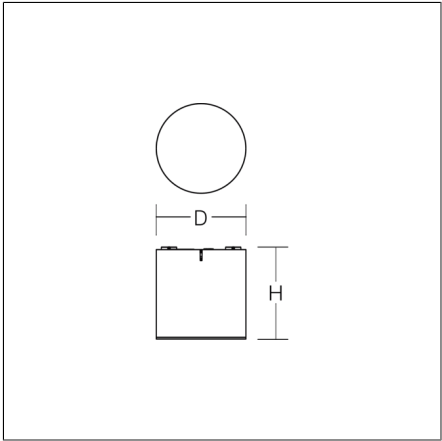

High-quality surface-mounted downlight for indoor and outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass. Rotation-symmetric reflector made of reflex-boosted MIRO-SILVER®. Easy installation with a separate ceiling frame and plug connection.. 5 pole double terminal for through-wiring.

Product specifications

Diameter D	154 mm
Height H	157 mm
Weight	2.6 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2100 lm
System power	15 W
System efficiency	140 lm/W
Glare evaluation UGR (4H 8H)	18,8
Beam angle	63°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	18 A / 250 µs
CIE Flux Code / CEN Flux Code	94 98 99 100 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK08
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC

Accessories



982716.004
Pendant set, 3 m with 5-pin power cable (IP 68)



982720.004
Pendant set, 5 m with 5-pin power cable (IP 68)

ANDHO midi

931196.004.1.76 | Surface mounted downlights



982160.000
Reeded glass