




Pendant luminaires
4010319923255
L 350, B 56, H 200

pendant
silver, matt (approx. RAL 9006)

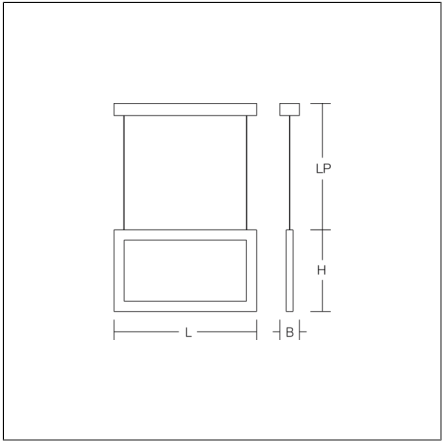

Luminaire for escape route identification. Housing: anodised aluminium, silver. Display panel: patented MicroLens technology and legend on both sides. 2-point steel cable suspension, steplessly adjustable. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	NiCd
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	350 mm
Width B	56 mm
Height H	200 mm
Suspension length LP	500 mm
Weight	1.99 kg
Light source	LED
Colour temperature	5700 K
System power, mains operation	7,1 W
Colour rendering index (CRI)	80
Colour tolerance	6
Photobiological safety according to EN 62471	Risk group 0
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE