Product Data Sheet: Air-termination Masts for HVI light Conductors on Flat Roofs

FM D50 16 10 3900 GFK AL DBS KB STTZN (819 385)

Figure without obligation

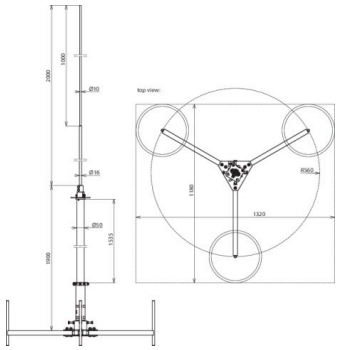

Type Part No.	FM D50 16 10 3900 GFK AL DBS KB STTZN 819 385
Height	3900 mm
Material of tripod	St/tZn
Space required for tripod	1180 x 1320 mm
Radius of tripod	560 mm
Material of supporting tube	GRP / Al
Length of supporting tube	1900 mm
Insulating clearance	1535 mm
Diameter Ø outside	50 mm
Length of air-termination rod	2000 mm
Material of air-termination rod	Al
Type of screw	M10 x 40
Max. gust wind speed (3 blocks, 17 kg each)	113 km/h
Max. gust wind speed (6 blocks, 17 kg each)	147 km/h
Max. gust wind speed (9 blocks, 17 kg each)	179 km/h
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	13,15 kg
Customs tariff number	85389099
GTIN	4013364241923
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.