



BRICK mini

581632.0031 | Wall luminaires

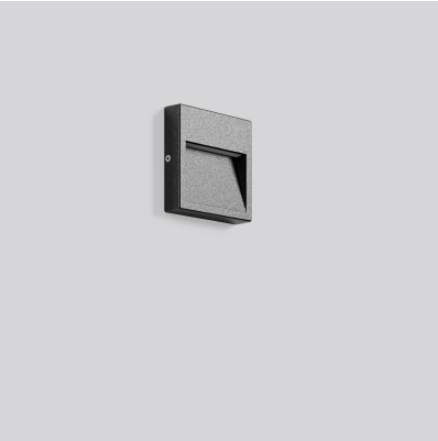

Wall luminaires
4051859113744
L 120, B 120, H 24

Wall (surface)
anthracite metallic (DB703)

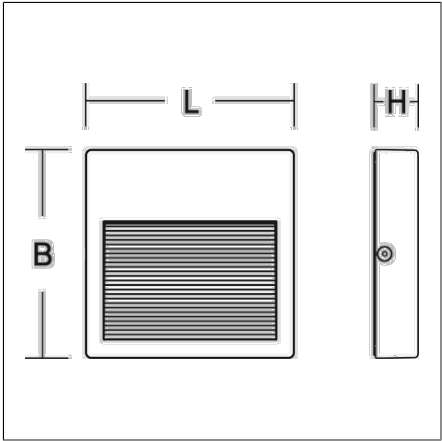

Flat surface-mounted LED fitting for illumination of wall related areas such as stairs, ramps or corridors. Housing made of corrosion-resistant die-cast aluminium, powder-coated. Stainless steel screws. Diffuser with clear toughened glass. Asymmetrical downward light distribution for wide dispersion and uniform illumination. With compensation for drill hole deviations. Driver integrated. With connecting terminal up to 1 x 3 x 1.5 mm², for max. 13 mm diameter mains cable.

Product specifications

Length L	120 mm
Width B	120 mm
Height H	24 mm
Weight	404 g
Light source	LED
Colour temperature	3000 K
Rated luminous flux	55 lm
System power	4 W
System efficiency	14 lm/W
Glare evaluation UGR (4H 8H)	29,1
Beam angle	45°/90°/0°/90°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Inrush current / Inrush current duration	17.3 A / 34 µs
CIE Flux Code / CEN Flux Code	53 82 95 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK09
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC