

Axyl Opera

THORN

96701109 AXYL OPERA XL WO 30L 930 WB HFX ANT

LED 11W AXYL_OP_XL_WB930X	IP67	IK09	⊕	CE	
---------------------------	------	------	---	----	--


Axyl Opera

AXYL Opera, a floor recessed, architectural LED luminaire for decorative facade lighting, with wide beam distribution. Class I electrical.. DALI-2 dimmable LED driver. , IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 280 x 280 x 245 mm
Luminaire input power: 11.1 W
Luminaire luminous flux: 288 lm
Luminaire efficacy: 26 lm/W
Weight: 6.16 kg



TLG_AXYL_F_OPERA_XL_WO_WB_ANT.jpg

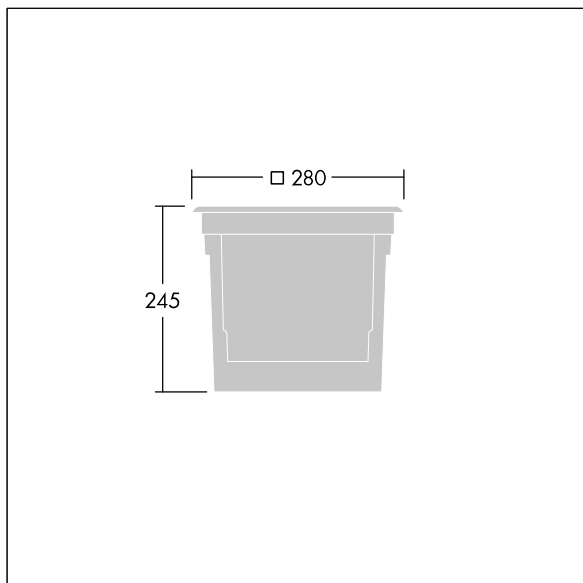

TLG_AXYL_M_OPERA_XL.wmf

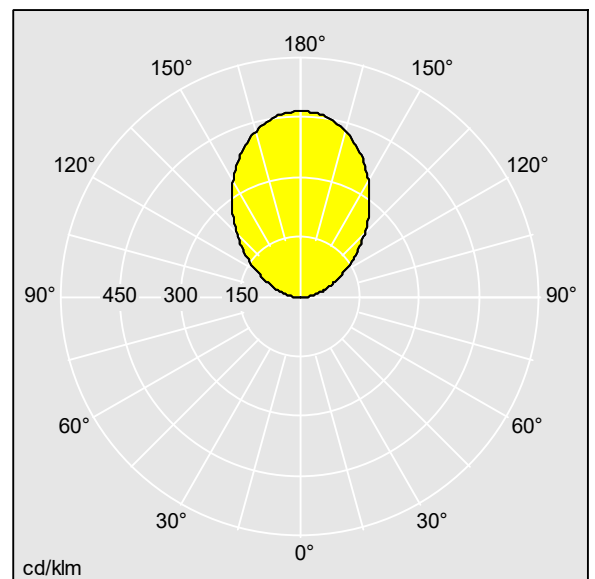

96701109.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 288 lm
Luminaire efficacy*: 26 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 11.1 W Power factor = 0.95
Dimming: Dali2Dim
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting